

EMC TEST REPORT
For

Mid Ocean Brands B.V.

Pedometer

Test Model: MO8508

Prepared for : Mid Ocean Brands B.V.
Address : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha
Wan, Kowloon, Hong Kong

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 601, Xingyuan Industrial Park, Gushu Community,
Xixiang Street, Bao'an District, Shenzhen, Guangdong,
China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : May 22, 2019
Number of tested samples : 1
Serial number : Prototype
Date of Test : May 22, 2019 ~ May 25, 2019
Date of Report : June 17, 2019



EMC TEST REPORT**EN 61000-6-3: 2007+A1: 2011**

Emission standard for residential, commercial and light-industrial environments

EN 61000-6-1: 2007

Immunity for residential, commercial and light-industrial environments

Report Reference No.: LCS190521049AE**Date Of Issue: June 17, 2019****Testing Laboratory Name: Shenzhen LCS Compliance Testing Laboratory Ltd.**Address: 101, 601, Xingyuan Industrial Park, Gushu Community,
Xixiang Street, Bao'an District, Shenzhen, Guangdong,
ChinaTesting Location/ Procedure...: Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method **Applicant's Name: Mid Ocean Brands B.V.**Address: 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan,
Kowloon, Hong Kong**Test Specification:**Standard: EN 61000-6-3: 2007+A1: 2011
EN 61000-6-1: 2007

Test Report Form No.: LCSEMC-1.0

TRF Originator: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF: Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.


This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.....: Pedometer


Trade Mark: N/A

Test Model.....: MO8508

Ratings: DC 1.5V

Result: Positive**Compiled by:**

Mia Huang/ File administrators

Supervised by:

Leo Lee / Technique principal

Approved by:

Gavin Liang/ Manager

EMC -- TEST REPORT

Test Report No. : LCS190521049AE	<u>June 17, 2019</u> Date of issue
---	---------------------------------------

Test Model : MO8508 EUT..... : Pedometer
Applicant..... : Mid Ocean Brands B.V. Address..... : 7/F., Kings Tower,111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong Telephone..... : / Fax..... : /
Manufacturer..... : 114628 Address..... : / Telephone..... : / Fax..... : /
Factory..... : 114628 Address..... : / Telephone..... : / Fax..... : /

Test Result according to the standards on page 7: **Positive**

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	June 17, 2019	Initial Issue	Gavin Liang

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results	6
1.2. Description of Performance Criteria	7
2. GENERAL INFORMATION	8
2.1. Description of Device (EUT)	8
2.2. Description of Test Facility	8
2.3. Statement of the measurement uncertainty	9
2.4. Measurement Uncertainty	9
3. MEASURING DEVICE AND TEST EQUIPMENT	10
3.1. Radiated Disturbance (Electric Field)	10
3.2. Electrostatic Discharge	10
3.3. RF Field Strength Susceptibility	10
3.4. Power Frequency Magnetic Field Susceptibility	10
4. RADIATED EMISSION MEASUREMENT	11
4.1. Block Diagram of Test Setup	11
4.2. Measuring Standard	11
4.3. Radiated Emission Limits	11
4.4. EUT Configuration on Test	12
4.5. Operating Condition of EUT	12
4.6. Test Procedure	12
4.7. Test Results	12
5. ELECTROSTATIC DISCHARGE IMMUNITY TEST	14
5.1. Block Diagram of Test Setup	14
5.2. Test Standard	14
5.3. Severity Levels and Performance Criterion	14
5.4. EUT Configuration on Test	14
5.5. Operating Condition of EUT	14
5.6. Test Procedure	15
5.7. Test Results	15
6. RF FIELD STRENGTH SUSCEPTIBILITY TEST	17
6.1. Block Diagram of Test	17
6.2. Test Standard	17
6.3. Severity Levels and Performance Criterion	17
6.4. EUT Configuration on Test	18
6.5. Operating Condition of EUT	18
6.6. Test Procedure	18
6.7. Test Results	18
7. MAGNETIC FIELD SUSCEPTIBILITY TEST	20
7.1. Block Diagram of Test Setup	20
7.2. Test Standard	20
7.3. Severity Levels and Performance Criterion	20
7.4. EUT Configuration on Test	20
7.5. Test Procedure	21
7.6. Test Results	21
8. PHOTOGRAPH	23
8.1. Photo of Radiated Measurement	23
8.2. Photo of Electrostatic Discharge Test	23
8.3. Photo of Radio-frequency, Continuous radiated disturbance	24
8.4. Photo of Magnetic Field Immunity Test	24
9. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	25

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION (EN 61000-6-3: 2007+A1: 2011)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55032: 2015	Class B	N/A
Conducted disturbance at telecommunication port	EN 55032: 2015	Class B	N/A
Radiated disturbance	EN 55032: 2015	Class B	PASS
Harmonic current emissions	EN 61000-3-2: 2014	Class A	N/A
Voltage fluctuations & flicker	EN 61000-3-3: 2013	-----	N/A
IMMUNITY (EN 61000-6-1: 2007)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2: 2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3: 2006+A2: 2010	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4: 2012	B	N/A
Surge (Input a.c. power ports)	EN 61000-4-5: 2014+A1: 2017	B	N/A
Surge (Telecommunication ports)		B	N/A
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6: 2014	A	N/A
Power frequency magnetic field	EN 61000-4-8: 2010	A	PASS
Voltage dips, >95% reduction	EN 61000-4-11: 2004+A1: 2017	B	N/A
Voltage dips, 30% reduction		B	N/A
Voltage interruptions		C	N/A
N/A is an abbreviation for Not Applicable.			

Test mode:		
Mode 1	Working	Record
***Note: All test modes were tested, but we only recorded the worst case in this report.		

1.2. Description of Performance Criteria

General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

1.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Pedometer

Trade Mark : N/A

Test Model : MO8508

Power Supply : DC 1.5V

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 108 \text{ MHz}$ $108 \text{ MHz} < F_x \leq 500 \text{ MHz}$ $500 \text{ MHz} < F_x \leq 1 \text{ GHz}$ $F_x > 1 \text{ GHz}$	1 GHz 2 GHz 5 GHz $5 \times F_x$ up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies. Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.	

2.2. Description of Test Facility

Site Description

EMC Lab. : FCC Registration Number. is 254912.
 Industry Canada Registration Number. is 9642A-1.
 ESMD Registration Number. is ARCB0108.
 UL Registration Number. is 100571-492.
 TUV SUD Registration Number. is SCN1081.
 TUV RH Registration Number. is UA 50296516-001.
 NVLAP Registration Code is 600167-0.

2.3.Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.4.Measurement Uncertainty

Test Item	Frequency Range	Expanded uncertainty (U _{lab})	Expanded uncertainty (U _{cispr})
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Power disturbance	Level accuracy (30MHz to 300MHz)	± 2.90dB	± 4.5 dB
Electromagnetic Radiated Emission (3-loop)	Level accuracy (9kHz to 30MHz)	± 3.60 dB	± 3.3 dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	± 3.68 dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB
Mains Harmonic	Voltage	± 0.510%	N/A
Voltage Fluctuations & Flicker	Voltage	± 0.510%	N/A
EMF		± 21.59%	N/A

- (1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.
- (2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. Radiated Disturbance (Electric Field)

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Software	AUDIX	E3	/	2018-06-16
2	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2018-06-16
3	Positioning Controller	MF	MF-7082	/	2018-06-16
4	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2018-07-26
5	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2018-07-02
6	EMI Test Receiver	R&S	ESR 7	101181	2018-06-16
7	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2018-11-15
8	AMPLIFIER	QuieTek	QTK	CHM/0809065	2018-11-15
9	RF Cable-R03m	Jye Bao	RG142	CB021	2018-06-16
10	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2018-06-16

3.2. Electrostatic Discharge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	SCHLODER	SESD 230	604035	2018-07-02

3.3. RF Field Strength Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	RS Test Software	Tonscend	/	/	2018-06-16
2	ESG Vector Signal Generator	Agilent	E4438C	MY42081396	2018-11-15
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2018-06-16
4	RF POWER AMPLIFIER	OPHIR	5225R	1052	NCR
5	RF POWER AMPLIFIER	OPHIR	5273F	1019	NCR
6	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	NCR
7	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-484	NCR
8	Electric field probe	Narda S.TS./PMM	EP601	611WX80208	2019-03-25


Note: NCR means no calibration requirement

3.4. Power Frequency Magnetic Field Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power frequency mag-field generator System	EVERFINE	EMS61000-8K	906003	2018-06-16

4. RADIATED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup

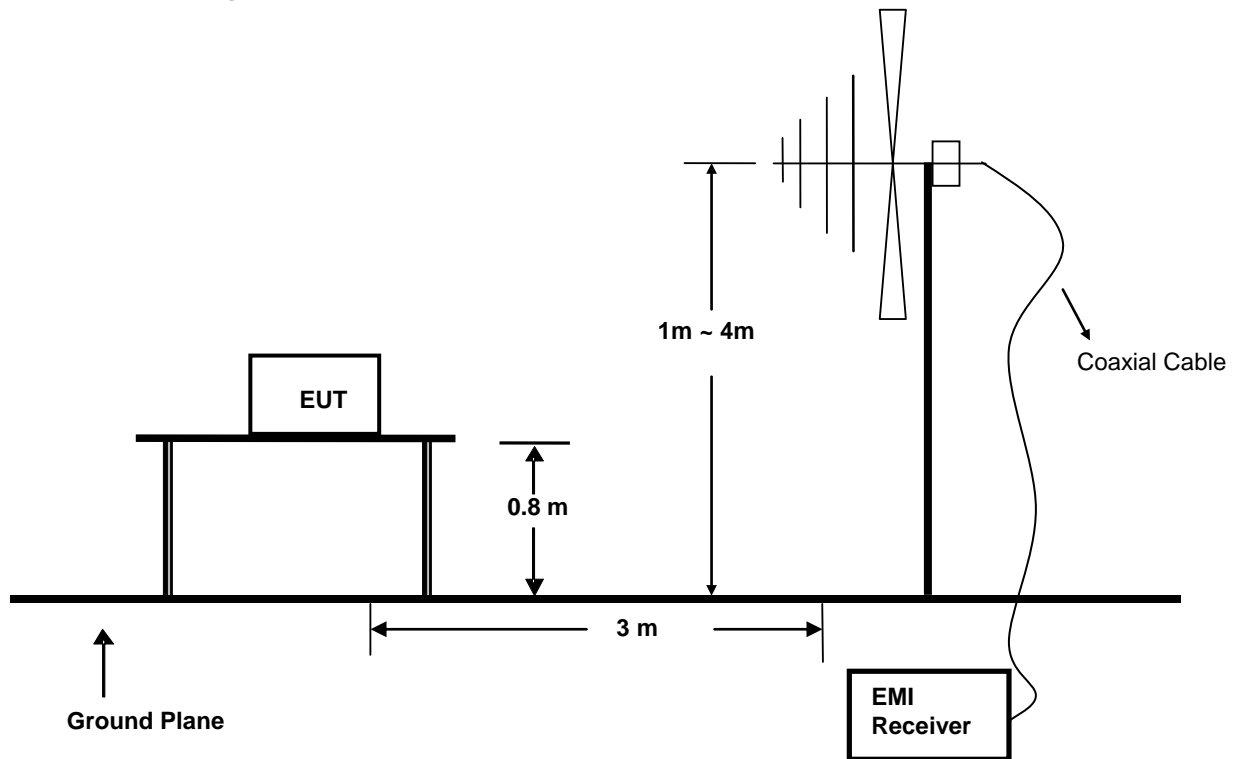

4.2. Measuring Standard

EN 61000-6-3: 2007+A1: 2011(EN 55032: 2015)

4.3. Radiated Emission Limits

EN 55032 Limits:

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The smaller limit shall apply at the combination point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

4.4.EUT Configuration on Test

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

4.5.Operating Condition of EUT

4.5.1 Turn on the power.

4.5.2 After that, let the EUT work in test mode (1) and measure it.

4.6.Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the Receiver is set at 120kHz.


The frequency range from 30MHz to 1000MHz is investigated.

4.7.Test Results

PASS.

The test result please refer to the next page.


Test Model	MO8508	Test Mode	Mode 1
Environmental Conditions	23.9°C, 54.3% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Jay Li	Test Voltage	DC 1.5V

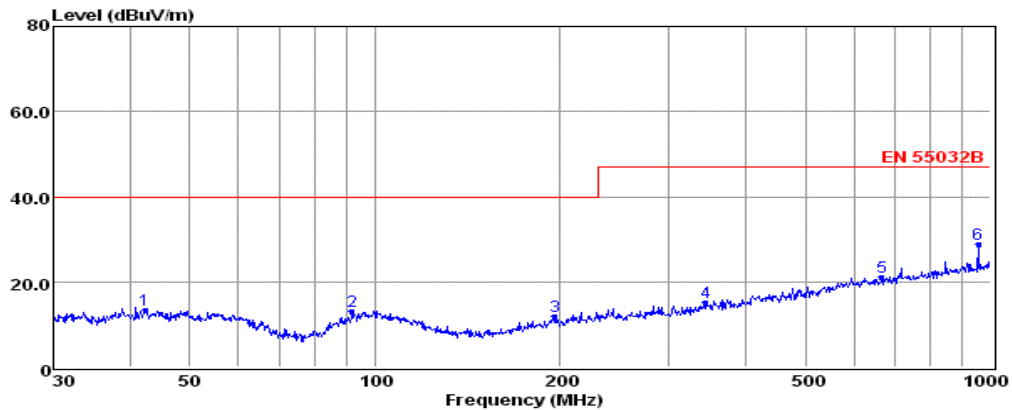

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	42.30	-0.62	0.50	13.57	13.45	40.00	-26.55	QP
2	91.82	0.35	0.56	12.24	13.15	40.00	-26.85	QP
3	195.82	0.41	0.96	10.57	11.94	40.00	-28.06	QP
4	344.39	-0.01	1.13	14.19	15.31	47.00	-31.69	QP
5	665.80	1.01	1.55	18.69	21.25	47.00	-25.75	QP
6	955.44	5.54	1.89	21.45	28.88	47.00	-18.12	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Test Model	MO8508	Test Mode	Mode 1
Environmental Conditions	23.9°C, 54.3% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Jay Li	Test Voltage	DC 1.5V

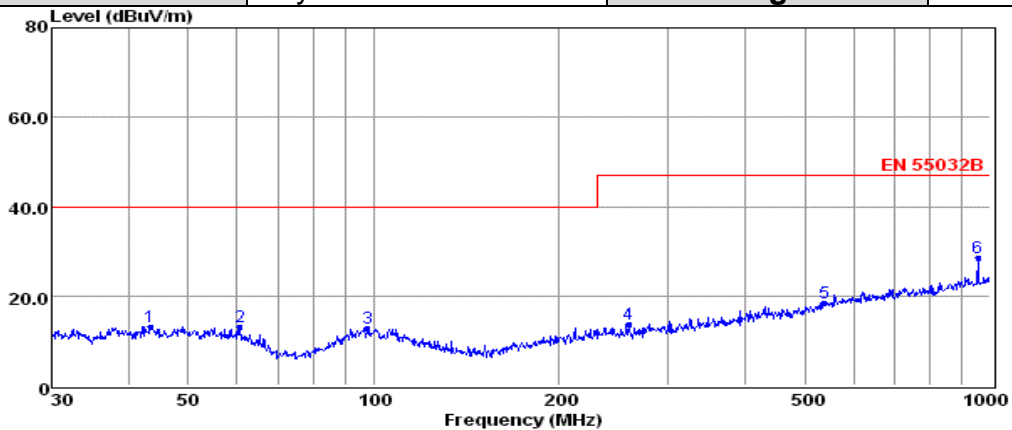


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	43.35	-0.84	0.50	13.56	13.22	40.00	-26.78	QP
2	60.70	0.15	0.49	12.41	13.05	40.00	-26.95	QP
3	97.80	-0.73	0.61	13.02	12.90	40.00	-27.10	QP
4	259.23	0.64	1.01	12.05	13.70	47.00	-33.30	QP
5	537.59	-0.24	1.45	17.28	18.49	47.00	-28.51	QP
6	955.44	5.15	1.89	21.45	28.49	47.00	-18.51	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

5. ELECTROSTATIC DISCHARGE IMMUNITY TEST

5.1. Block Diagram of Test Setup

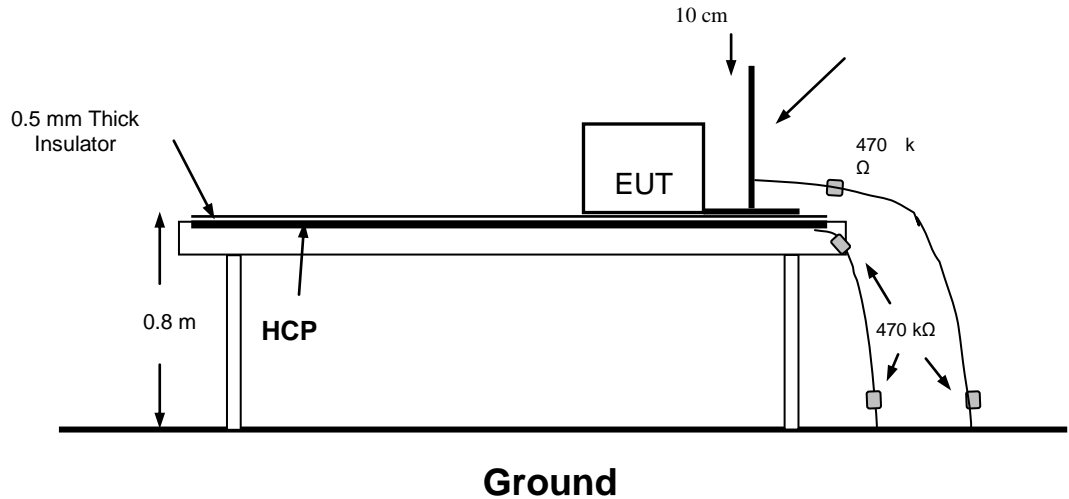

5.2. Test Standard

EN 61000-6-1: 2007 (EN 61000-4-2: 2009,
Severity Level: 3 / Air Discharge: ± 8 KV, Level: 2 / Contact Discharge: ± 4 KV)

5.3. Severity Levels and Performance Criterion

5.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

5.3.2. Performance Criterion: **B**

5.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.

5.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 4.5.
Except the test set up replaced by Section 5.1.

5.6. Test Procedure

5.6.1. Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

5.6.2. Contact Discharge

All the procedure shall be same as Section 5.6.1. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

5.6.3. Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

5.6.4. Indirect Discharge For Vertical Coupling Plane

At least 10 single discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

5.7. Test Results

PASS.

Please refer to the following pages

Electrostatic Discharge Test Results

Standard	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
Applicant	Mid Ocean Brands B.V.		
EUT	Pedometer	Temperature	23.5°C
M/N	MO8508	Humidity	54.3%
Criterion	B	Pressure	1021mbar
Test Mode	Mode 1	Test Engineer	Jay Li

Air Discharge

Test Points	Test Levels			Results		
	± 2kV	± 4kV	± 8kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Contact Discharge

Test Points	Test Levels		Results		
	± 2 kV	±4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Discharge To Horizontal Coupling Plane


Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Discharge To Vertical Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

6. RF FIELD STRENGTH SUSCEPTIBILITY TEST

6.1. Block Diagram of Test

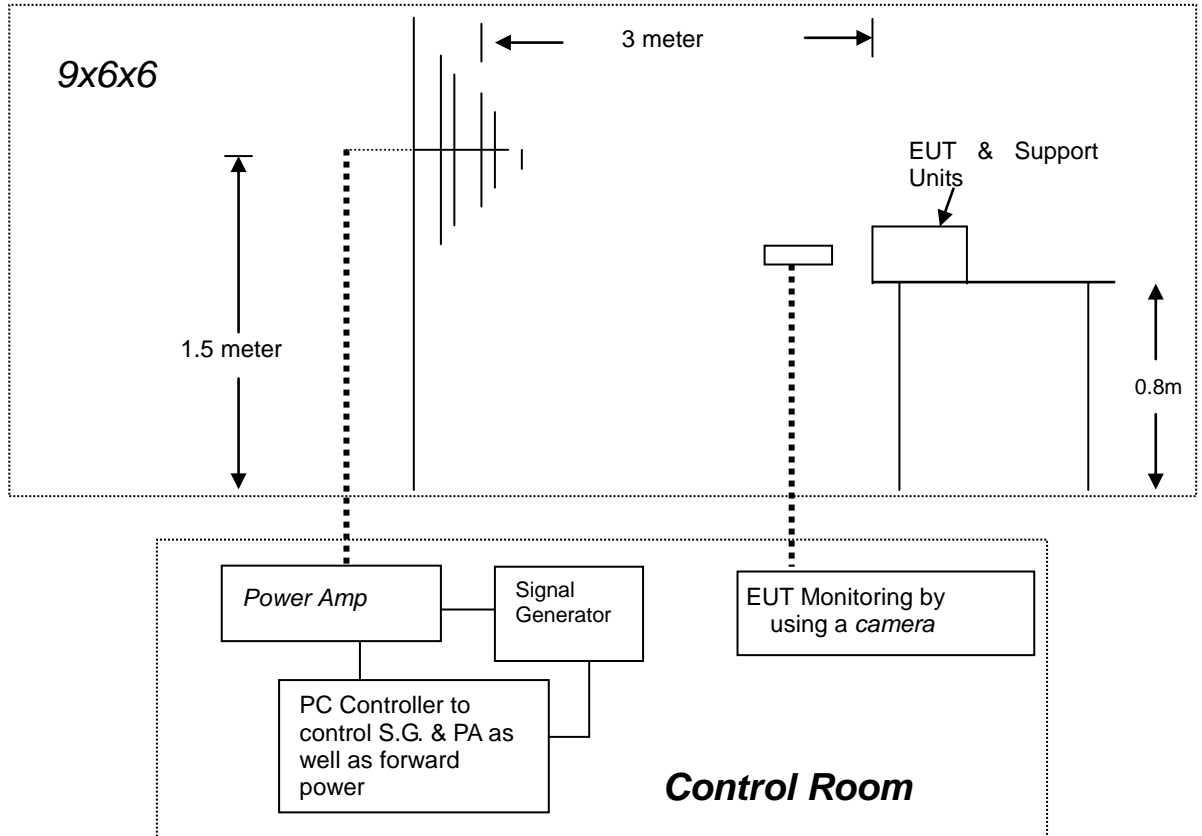

6.2. Test Standard

EN 61000-6-1: 2007

(EN 61000-4-3: 2006+A2: 2010, Severity Level: 2, 3V/ m)

6.3. Severity Levels and Performance Criterion

6.3.1. Severity Levels

Level	Field Strength (V/m)
1.	1
2.	3
3.	10
X.	Special

6.3.2. Performance Criterion: **A**

6.4.EUT Configuration on Test

The configuration of the EUT is same as Section 3.

6.5.Operating Condition of EUT

Same as radiated emission measurement, which is listed in Section 4.5, except the test setup replaced as Section 6.1.

6.6.Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD Recording is used to monitor its screen.

All the scanning conditions are as following:

Condition of Test -----	Remark -----
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80-6000MHz
4. Sweep time of radiated	0.0015 Decade/s
5. Dwell Time	3 Sec.

6.7.Test Results

PASS.

Please refer to the following page.

RF Field Strength Susceptibility Test Results


Standard	<input type="checkbox"/> IEC 61000-4-3 <input checked="" type="checkbox"/> EN 61000-4-3		
Applicant	Mid Ocean Brands B.V.		
EUT	Pedometer	Temperature	23.9°C
M/N	MO8508	Humidity	54.3%
Field Strength	3 V/m	Criterion	A
Test Mode	Mode 1	Test Engineer	Jay Li
Frequency Range	80 MHz to 6000 MHz		
Modulation	<input type="checkbox"/> None <input type="checkbox"/> Pulse <input checked="" type="checkbox"/> AM 1KHz 80%		
Steps	1%		

	Horizontal	Vertical
Front	PASS	PASS
Right	PASS	PASS
Rear	PASS	PASS
Left	PASS	PASS

Note:

7. MAGNETIC FIELD SUSCEPTIBILITY TEST

7.1. Block Diagram of Test Setup

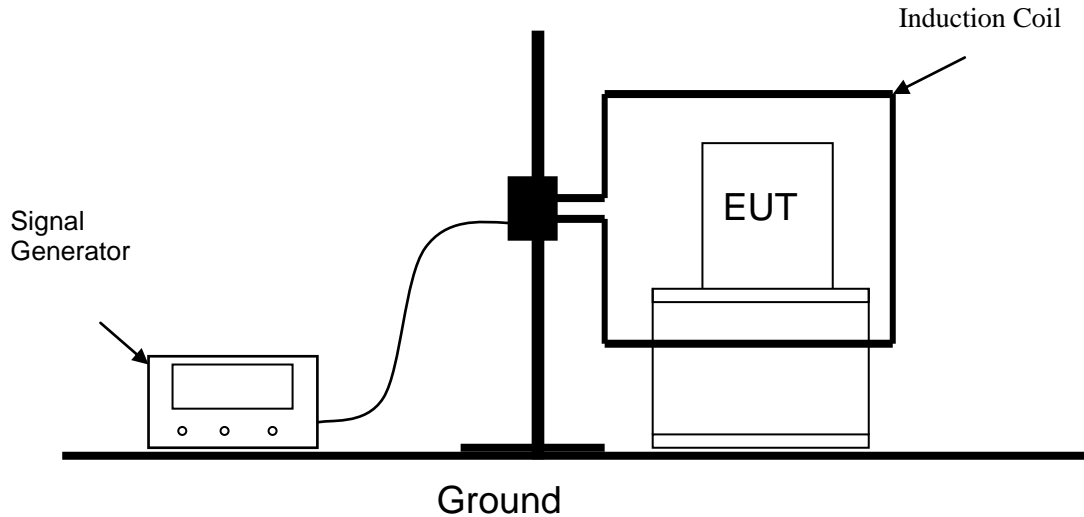

7.2. Test Standard

EN 61000-6-1: 2007
 (EN 61000-4-8: 2010, Severity Level: Level 2, 3A/ m)

7.3. Severity Levels and Performance Criterion

7.3.1. Severity Levels

Level	Field Strength (A/m)
1	1
2	3
3	10
4	30
5	100
X	Special

7.3.2. Performance Criterion: **A**

7.4. EUT Configuration on Test

The configuration of the EUT is same as Section 3.

7.5. Test Procedure

The EUT is placed in the middle of a induction coil (1*1m), under which is a 1*1*0.1m (high) table, this small table is also placed on a larger table, 0.8 m above the ground. Both horizontal and vertical polarization of the induction coil is set on test, so that each side of the EUT is affected by the magnetic field. Also can reach the same aim by change the position of the EUT.

7.6. Test Results

PASS.

Please refer to the following page.

Magnetic Field Immunity Test Result

Standard	<input type="checkbox"/> IEC 61000-4-8 <input checked="" type="checkbox"/> EN 61000-4-8		
Applicant	Mid Ocean Brands B.V.		
EUT	Pedometer	Temperature	23.9°C
M/N	MO8508	Humidity	54.3%
Test Mode	Mode 1	Criterion	A
Test Engineer	Jay Li		

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
3	5 mins	X	A	PASS
3	5 mins	Y	A	PASS
3	5 mins	Z	A	PASS

Note:

8. PHOTOGRAPH

8.1.Photo of Radiated Measurement



8.2.Photo of Electrostatic Discharge Test



8.3. Photo of Radio-frequency, Continuous radiated disturbance



8.4. Photo of Magnetic Field Immunity Test



9. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Fig. 1

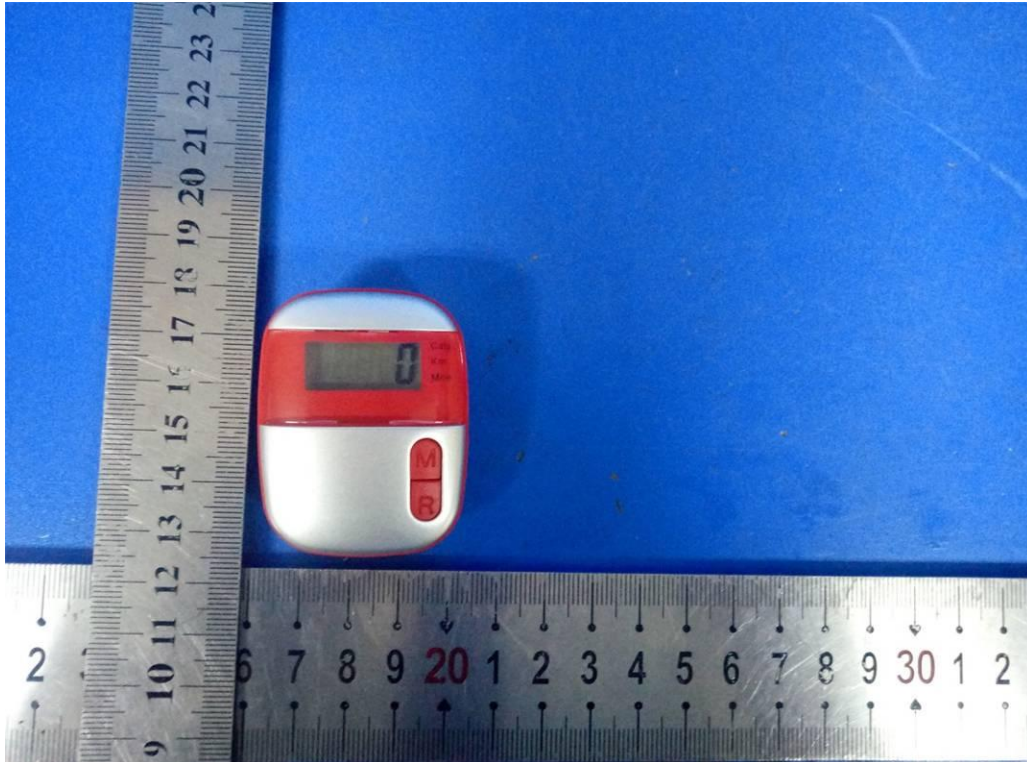


Fig. 2

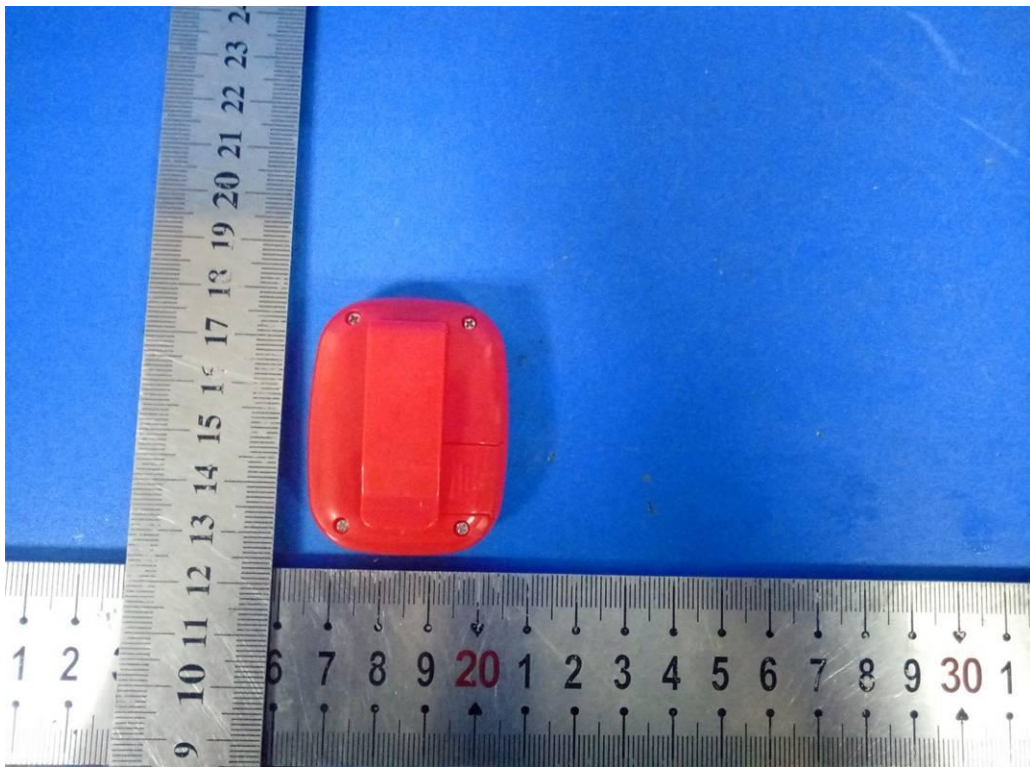


Fig. 3



Fig. 4

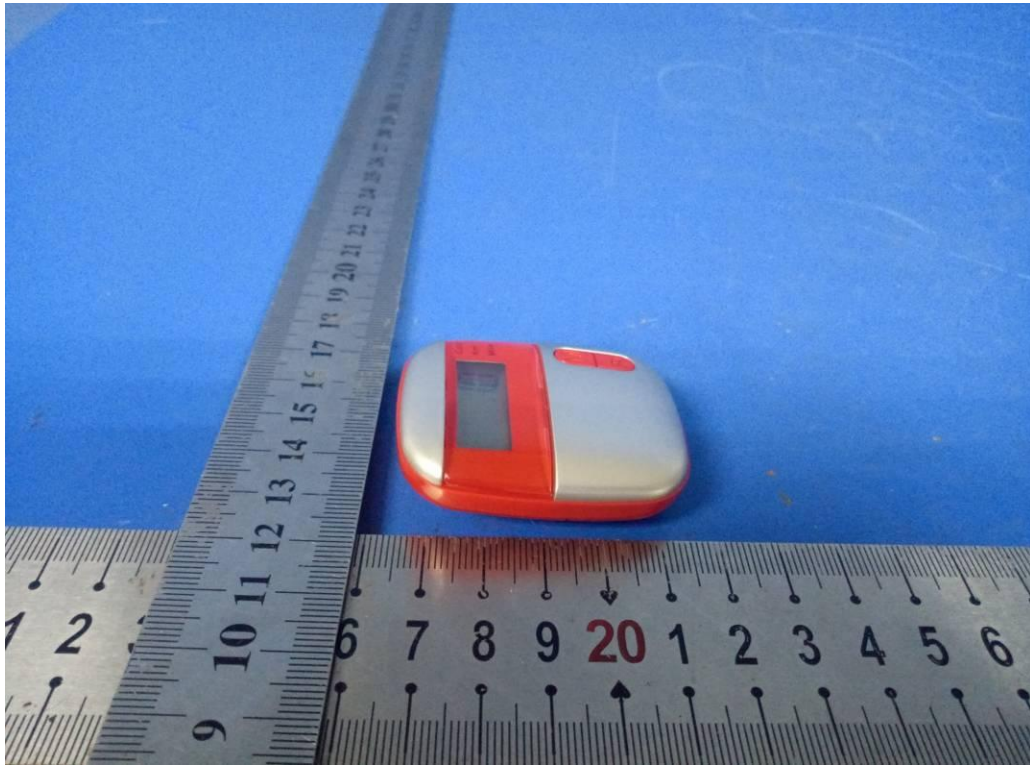


Fig. 5



Fig. 6



Fig. 7

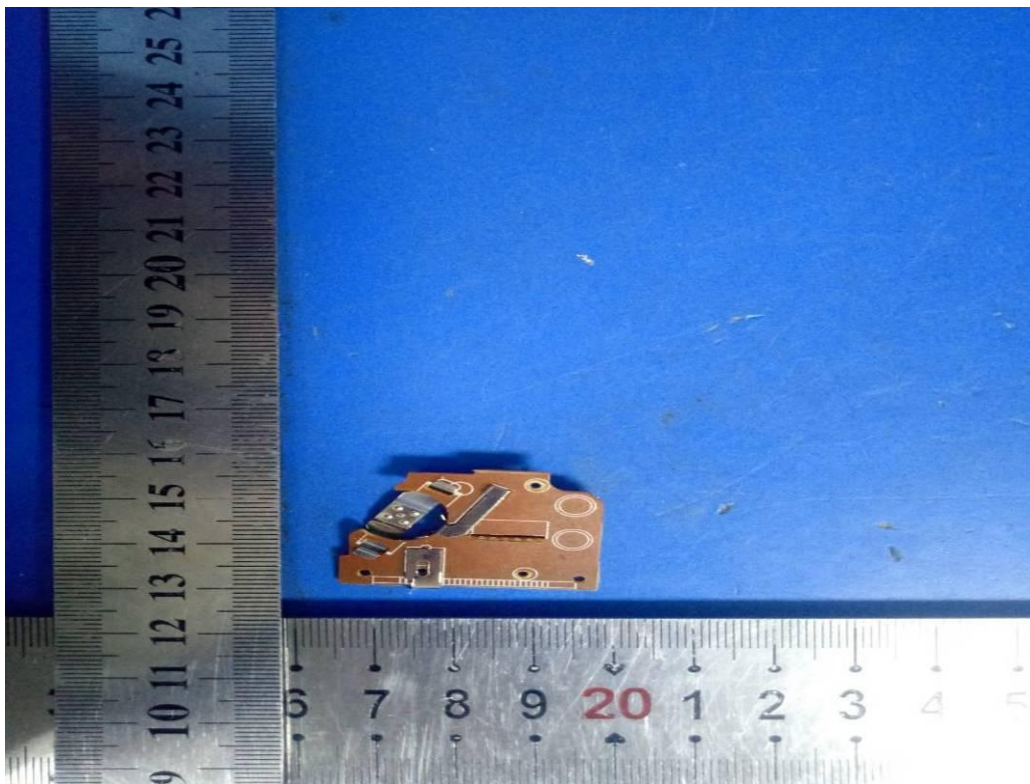


Fig. 8

-----THE END OF TEST REPORT-----