

Report No.: LCS190408063AR

TEST REPORT

Client company	:	Mid Ocean Brands B.V.
Client address	:	7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer	:	114628
Address	:	I
Report on the submitted	san	nples said to be:
Sample Name	:	weather station with photo frame
Trade Mark	:	N/A
Test Item No.	:	MO9695-40
Style/ Item No.	:	N/A
Sample Receiving Date	:	April 10, 2019
Testing Period	:	April 10, 2019 ~ May 05, 2019
Results	:	Please refer to next page(s).
*****	*****	******************************

Summary of Test Results:

TEST REQUEST

According to the customer's request, based on the performed tests on submitted sample, the results of lead(Pb), mercury(Hg), cadmium(Cd), hexavalent chromium(Cr⁶⁺),polybrominated biphenyls(PBBs), polybrominated diphenyl(PBDEs), (BBP), (DEP), (DEHP), (DIBP), comply with the limits as set by EU RoHS Directive 2011/65/EU and its amendment Directive 2015/863/EU

Signed for and on behalf of LCS

j: " millar

Checked by:



uez Su



Version:V1.0

Written By:

Page 1 of 22



Report No.: LCS190408063AR

Results:

A. EU RoHS Directive 2011/65/EU and its amendment directives on XRF

Test method: With reference to IEC 62321-3-1:2013, Screening by X-ray Fluorescence Spectroscopy (XRF)

				Date of				
Seq. No.	Tested Part(s)	Cd	Pb	Hg	Cr(Cr ⁶⁺) [▼]	В	r	sample submission/r
		Cu		iig		PBBs	PBDEs	esubmission
1	Yellow wood	BL	BL	BL	BL	BL	BL	2019-04-10
2	Blue paper	BL	BL	BL	BL	BL	BL	2019-04-10
3	Transparent glass sheet	BL	BL	BL	BL	BL	BL	2019-04-10
4	Gray plastic sheet	BL	BL	BL	BL	Х	Х	2019-04-10
5	Silver metal spring sheet	BL	BL	BL	BL	/	/	2019-04-10
6	Silver metal sheet	BL	BL	BL	Х	/	/	2019-04-10
7	Gray plastic sheet	BL	BL	BL	BL	BL	BL	2019-04-10
8	Gray plastic sheet	BL	BL	BL	BL	BL	BL	2019-04-10
9	Gray plastic sheet	BL	BL	BL	BL	BL	BL	2019-04-10
10	Gray plastic sheet	BL	BL	BL	BL	Х	Х	2019-04-10
11	Silver plastic sheet	BL	BL	BL	BL	Х	Х	2019-04-10
12	Gray plastic sheet	BL	BL	BL	BL	BL	BL	2019-04-10
13	Grey glass sheet	BL	BL	BL	BL	BL	BL	2019-04-10
14	White plastic sheet	BL	BL	BL	BL	BL	BL	2019-04-10
15	Black plastic sheet	BL	BL	BL	BL	BL	BL	2019-04-10
16	Gray plastic sheet	BL	BL	BL	BL	BL	BL	2019-04-10
17	Black resistance	BL	BL	BL	BL	BL	BL	2019-04-10
18	Tin solder	BL	BL	BL	BL	/	/	2019-04-10
19	Silver metal needle	BL	OL	BL	BL	/	/	2019-04-10
20	Silver metal tube	BL	OL	BL	BL	/	/	2019-04-10
21	Brown patch capacitor	BL	BL	BL	BL	BL	BL	2019-04-10
22	Black plastic sheet	BL	BL	BL	BL	BL	BL	2019-04-10
23	Black IC	BL	BL	BL	BL	BL	BL	2019-04-10
24	PCB board	BL	BL	BL	BL	BL	BL	2019-04-10
25	Black plastic sheet	BL	BL	BL	BL	Х	Х	2019-04-10
26	Silver metal sheet	BL	BL	BL	BL	/	/	2019-04-10



Tel: (86)755-23353209

Internet: Http://www.LCS-cert.com

Report No.: LCS190408063AR

0			Date of					
Seq. No.	Tested Part(s)	Cd	Pb	Hg	Cr(Cr ⁶⁺) [▼]	В	r▼	sample submission/r
		Cu	ΓD	iig		PBBs	PBDEs	esubmission
27	Grey magnet sheet	BL	BL	BL	Х	/	/	2019-01-11
28	Gold wire	BL	BL	BL	BL	/	/	2019-01-11
29	Silver metal sheet	BL	BL	BL	BL	/	/	2019-01-11
30	Blue plastic linen	BL	BL	BL	BL	BL	BL	2019-01-11
31	Red plastic linen	BL	BL	BL	BL	BL	BL	2019-01-11
32	Gold wire	BL	BL	BL	BL	/	/	2019-01-11
33	Silver metal screw	BL	BL	BL	BL	/	/	2019-01-11
34	Silver metal screw	BL	BL	BL	BL	/	/	2019-01-11

Note:

(1) Results were obtained by XRF for primary screening, and further chemical testing by ICP (for Cd, Pb, Hg), UV-Vis (for Cr(VI)) and GC-MS (for PBBs, PBDEs) are recommended to be performed, if the concentration exceeds the below warning value according to IEC 62321-3-1:2013.

Element	Unit	Non-metal	Metal	Composite Material
Cd	mg/kg	BL≤70-3σ<Χ <130+3σ≤OL	BL≤70-3σ <x <130+3σ≤OL</x 	BL≤50-3σ<Χ <150+3σ≤OL
Pb	mg/kg	BL≤700-3σ<Χ <1300+3σ≤OL	BL≤700-3σ <x <1300+3σ≤OL</x 	BL≤500-3σ<Χ <1500+3σ≤OL
Hg	mg/kg	BL≤700-3σ<Χ <1300+3σ≤OL	BL≤700-3σ <x <1300+3σ≤OL</x 	BL≤500-3σ<Χ <1500+3σ≤OL
Cr	mg/kg	BL≤700-3σ<Χ	BL≤700-3σ<Χ	BL≤500-3σ<Χ
Br	mg/kg	BL≤300-3σ<Χ		BL≤250-3σ<Χ



Report No.: LCS190408063AR

Note:

- OL = Over Limit
- X = Inconclusive
- (2) The XRF screening test for RoHS elements The reading may be different to the actual content in the sample be of non-uniformity composition.
- (3) The maximum permissible limit is quoted from the document 2015/863/EC amending RoHS directive 2011/65/EU:
- (4) ▼=For restricted substances PBBs and PBDEs, the results show the total Br content; The restricted substance was Cr(VI), and the results showed the total Cr content

RoHS Restricted Substances	Maximum Concentration Value (mg/kg) (by weight in homogenous materials)
Cadmium (Cd)	100
Lead (Pb)	1000
Mercury (Hg)	1000
Hexavalent Chromium (Cr(VI))	1000
Polybrominated biphenyls (PBBs)	1000
Polybrominated diphenylethers (PBDEs)	1000
Dibuyl Phthalate(DBP)	1000
Benzylbutyl Phthalate(BBP)	1000
Bis(2-ethylhexyl) Phthalate(DEHP)	1000
Diispbutyl phthalate(DIBP)	1000

Disclaimers:

This XRF Screening report is for reference purposes only. The applicant shall make its/his/her own judgment as to whether the information provided in this XRF screening report is sufficient for its/his/her purposes.

The result shown in this XRF screening report will differ based on various factors, including but not limited to, the sample size, thickness, area, surface flatness, equipment parameters and matrix effect (e.g. plastic, rubber, metal, glass, ceramic etc.). Further wet chemical pre-treatment with relevant chemical equipment analysis are required to obtain quantitative data.



Report No.: LCS190408063AR

B. EU RoHS Directive 2011/65/EU and its amendment Directives 2015/863/EU on Lead, Cadmium, Mercury, Hexavalent Chromium, PBBs, PBDEs, DBP, BBP, DEHP, DIBP content.

Test method:

Lead & Cadmium Content:

With reference to IEC 62321-5:2013, by acid digestion and analysis was performed by inductively coupled plasma atomic emission spectrometer (ICP-OES)

Mercury Content:

With reference to IEC 62321-4:2013+AMD1:2017 CSV, by acid digestion and analysis was performed by inductively coupled plasma atomic emission spectrometer (ICP-OES)

Hexavalent Chromium Content:

With reference to IEC 62321-7-1:2015 or IEC 62321-7-2:2017, by alkaline digestion and analysis was performed by UV-visible spectrophotometer (UV-Vis)

PBBs & PBDEs Content:

With reference to IEC 62321-6:2015, by solvent extraction and analysis was performed by gas chromatographic-mass spectrometer (GC-MS)

BBP DBP DEHP & DIBP Content:

With reference to IEC 62321-8:2017, by solvent extraction and analysis was performed by gas chromatographic-mass spectrometer (GC-MS)

1) The test results of Lead (Pb)

ltem	Unit	MDL	Res	Limit	
nem	Onit		(19)	(20)	Liiiit
Lead Content (Pb)	mg/kg	2	2129 ^{#3}	5201 ^{#3}	1000 mg/kg
Conclusion	1	1	Pass	Pass	/

2) The test results of Hexavalent Chromium (Cr⁶⁺)(metal)

Item	Unit	Unit	MDL	Res	ults	Limit
nem	Onit		(6)	(6) (27)		
Hexavalent Chromium (Cr ⁶⁺)	ug/cm ²	0.10	N.D.	N.D.	1000 mg/kg	
Conclusion	1	1	Pass	Pass	/	



Add: F&G, 23/F., Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209 Internet: Http://www.LCS-cert.com

Report No.: LCS190408063AR

Note:

- MDL = Method Detection Limit
- /= Not apply
- LOQ = Limit of Quantification, The LOQ of Hexavalent chromium is 0.10 μg/cm²
- mg/kg = ppm=parts per million
- N.D.=Not Detected(<MDL or LOQ)
- *The sample is negative for Cr(VI)-The Cr(VI) concentration is below 0.10ug/cm²
 The coating is considered a non-Cr(VI) based coating.
- #1 According to RoHS directive 2011/65/EU and its amendments, Lead is exempted in glass of cathode ray tubes, electronic components and fluorescent tubes.
- #2 According to RoHS directive 2011/65/EU and its amendments, Lead is exempted in electronic ceramic parts (e.g. piezoelectronic devices).
- #3 According to RoHS directive 2011/65/EU and its amendments, Lead is exempted as an alloying element in Copper containing up to 4% (40000ppm) by weight.
- #4 According to RoHS directive 2011/65/EU and its amendments, Lead is exempted in high melting temperature type solders (i.e. lead-based alloys containing 85 % by weight or more lead).
- #5 According to the statement provided by the customer, according to RoHS directive 2011/65/EU and its amendments, Lead is exempted as an alloying element in Aluminum containing up to 0.4% (4000ppm) by weight.
- #6 According to the statement provided by the customer, according to RoHS directive 2011/65/EU and its amendments, Cadmium and its compounds in electrical contact is exempted.
- Flow chart appendix is included.
- Photo appendix is included.



Add: F&G, 23/F., Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209 Internet: Http://www.LCS-cert.com

Report No.: LCS190408063AR

3) The test results of DBP、BBP、DEHP & DIBP

Item	Unit	MDL		Limit		
	Onit		2	12	14	Linint
Dibuyl Phthalate(DBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg
Benzylbutyl Phthalate(BBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg
Bis(2-ethylhexyl) Phthalate(DEHP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg
Diispbutyl phthalate(DIBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg
Conclusion	1	1	Pass	Pass	Pass	/

Item	Unit	MDL		Limit			
	Onit		15	16	22	Linint	
Dibuyl Phthalate(DBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Benzylbutyl Phthalate(BBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Bis(2-ethylhexyl) Phthalate(DEHP)	mg/kg	50	N.D.	N.D.	264	1000 mg/kg	
Diispbutyl phthalate(DIBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Conclusion	1	1	Pass	Pass	Pass	/	

Item	Unit	MDL	Results			Limit	
litem	Unit		30	31	1+7+8	Linint	
Dibuyl Phthalate(DBP)	mg/kg	50	76.8	316.5	N.D.	1000 mg/kg	
Benzylbutyl Phthalate(BBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Bis(2-ethylhexyl) Phthalate(DEHP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Diispbutyl phthalate(DIBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Conclusion	1	1	Pass	Pass	Pass	/	



Add: F&G, 23/F., Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209

Internet: Http://www.LCS-cert.com

Report No.: LCS190408063AR

Item	Unit	Jnit MDL		Limit			
hem	Onit	WIDL	1+7+8	9+3+4	10+11+13	Liniit	
Dibuyl Phthalate(DBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Benzylbutyl Phthalate(BBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Bis(2-ethylhexyl) Phthalate(DEHP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Diispbutyl phthalate(DIBP)	mg/kg	50	N.D.	N.D.	N.D.	1000 mg/kg	
Conclusion	1	1	Pass	Pass	Pass	/	

ltem	Unit	MDL	Res	Limit	
liem	Unit	WDL	17+21+23	24+25	Linint
Dibuyl Phthalate(DBP)	mg/kg	50	N.D.	N.D.	1000 mg/kg
Benzylbutyl Phthalate(BBP)	mg/kg	50	N.D.	N.D.	1000 mg/kg
Bis(2-ethylhexyl) Phthalate(DEHP)	mg/kg	50	N.D.	N.D.	1000 mg/kg
Diispbutyl phthalate(DIBP)	mg/kg	50	N.D.	N.D.	1000 mg/kg
Conclusion	1	1	Pass	Pass	/



Add: F&G, 23/F., Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209

Internet: Http://www.LCS-cert.com

Report No.: LCS190408063AR

4) The test results of PBBs & PBDEs

ltem	Unit	MDL	Results			Limit	
nem	Unit	WIDL	(4) (10) (11) (25)				
Polybrominated Biphenyls (PBBs)							
Monobromobiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Dibromobiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Tribromobiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Tetrabromobiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Pentabromobiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Hexabromobiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Heptabromobiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Octabromobiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Nonabromodiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Decabromodiphenyl	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Total content	mg/kg	/	N.D.	N.D.	N.D.	N.D.	1000 mg/kg
Polybrominated Diphenylethers (PBDEs)(Mon-Deca)							
Monobromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Dibromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Tribromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Tetrabromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Pentabromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Hexabromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Heptabromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Octabromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Nonabromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Decabromodiphenyl ether	mg/kg	5	N.D.	N.D.	N.D.	N.D.	
Total content	mg/kg	/	N.D.	N.D.	N.D.	N.D.	1000 mg/kg
Conclusion	1	1	Pass	Pass	Pass	Pass	1

Remark:

- mg/kg = ppm -
- N.D. = Not detected -
- Flow chart appendix is included.
- Photo appendix is included.




Report No.: LCS190408063AR

Appendix

Test Flow chart

1. Test Flow chart for Cd / Pb /Hg content These samples were dissolved totally by pre-conditioning method according to below flow chart.

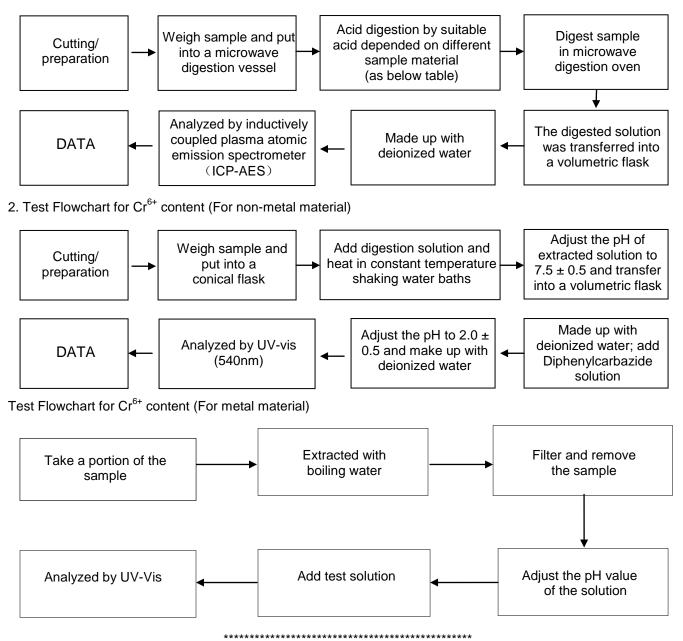



Report No.: LCS190408063AR

3. Test Flow chart for PBBs & PBDEs & DBP & BBP & DEHP & DIBP content


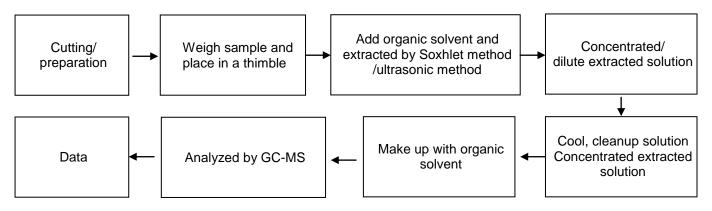


Table:

Sample Material	Digestion Acid
Steel, copper, aluminum, solder	Aqua regia, HNO ₃ , HCI, HF, H ₂ O ₂
Glass	HNO ₃ /HF
Gold, platinum, palladium, ceramic	Aqua regia
Silver	HNO ₃
Plastic	H ₂ SO ₄ , H ₂ O ₂ , HNO ₃ , HCI
Others	Any acid to total digestion




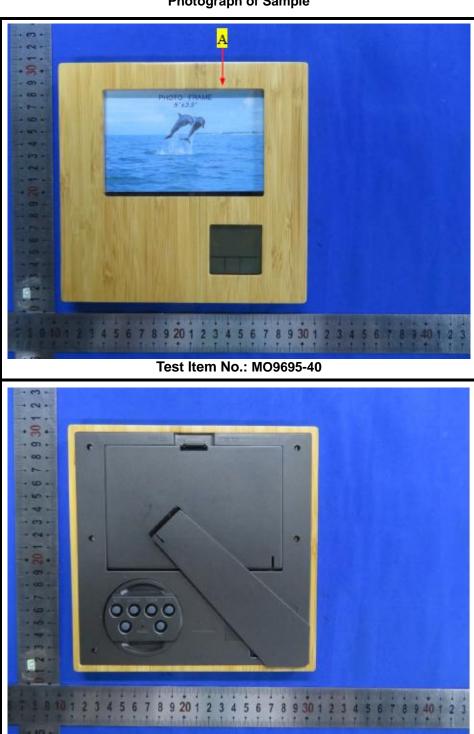


Appendix Photograph of Sample

-18-

Shenzhen LCS Compliance Testing Laboratory Ltd. Add: F&G, 23/F.,Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209 Internet: Http://www.LCS-cert.com

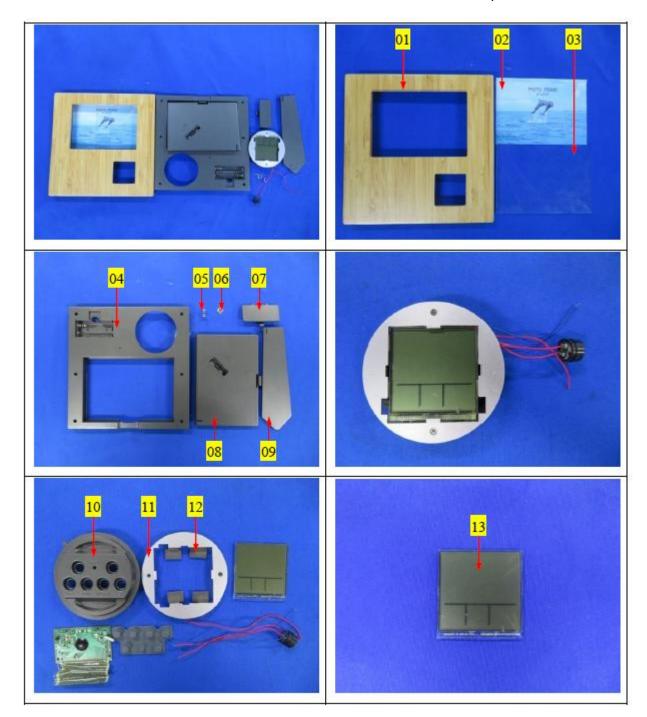




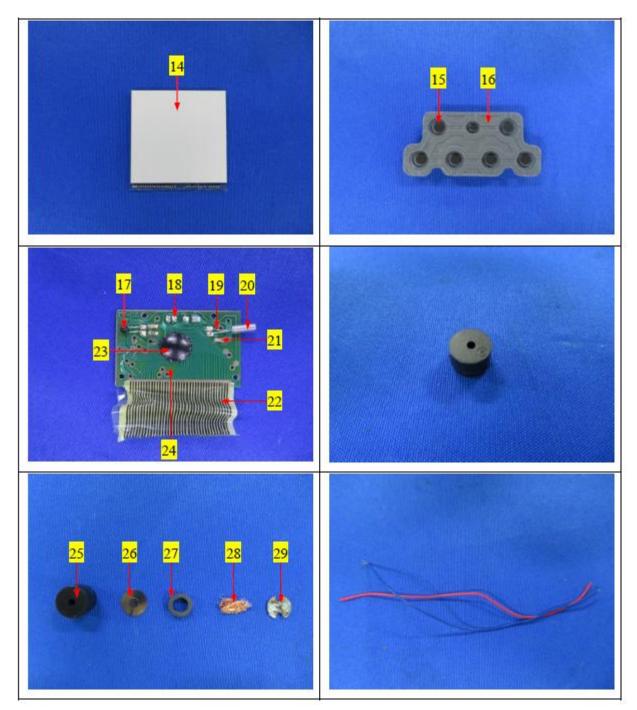



Report No.: LCS190408063AR

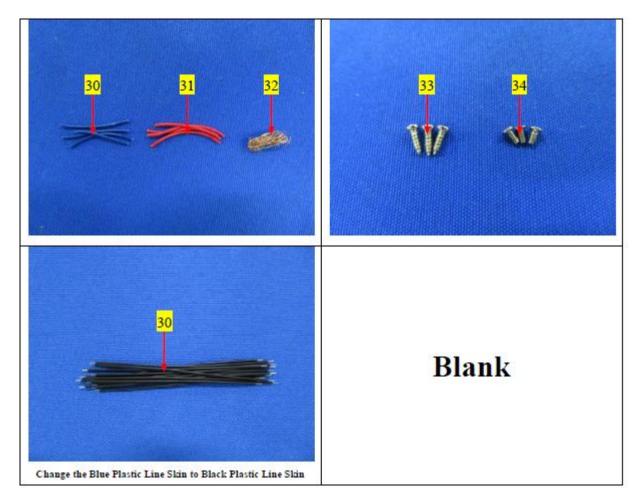

LCS authenticate the photo on original report only



Report No.: LCS190408063AR

Exempted Items of RoHS Directive

In accordance with Directive 2011/65/EU as amended , there are 41 exemption items in Annex III of 2011/65/EU altogether.

	Exemption	Scope and dates of applicability
1	Mercury in single capped (compact) fluorescent lamps not exceeding (per burner):	
1(a)	For general lighting purposes < 30 W: 5 mg	Expires on 31 December 2011; 3,5 mg may be used per burner after 31 December 2011 until 31 December 2012; 2,5 mg shall be used per burner after 31 December 2012.
1(b)	For general lighting purposes \geq 30 W and < 50 W: 5 mg	Expires on 31 December 2011; 3,5 mg may be used per burner after 31 December 2011.
1(c)	For general lighting purposes \ge 50 W and < 150 W: 5 mg	
1(d)	For general lighting purposes \geq 150 W: 15 mg	
1(e)	For general lighting purposes with circular or square structural shape and tube diameter $\leqslant\!17$ mm	No limitation of use until 31 December 2011; 7 mg may be used per burner after 31 December 2011.
1(f)	For special purposes: 5 mg	
1(g)	For general lighting purposes < 30 W with a lifetime equal or above 20 000 h: 3,5 mg	Expires on 31 December 2017.
2(a)	Mercury in double-capped linear fluorescent lamps for general lighting purposes not exceeding (per lamp):	
2(a)(1)	Tri-band phosphor with normal lifetime and a tube diameter < 9 mm (e.g. T2): 5 mg	Expires on 31 December 2011; 4 mg may be used per lamp after 31 December 2011.
2(a)(2)	Tri-band phosphor with normal lifetime and a tube diameter \ge 9 mm and \le 17 mm (e.g. T5): 5 mg	Expires on 31 December 2011; 3 mg may be used per lamp after 31 December 2011.
2(a)(3)	Tri-band phosphor with normal lifetime and a tube diameter > 17 mm and \leq 28 mm (e.g. T8): 5 mg	Expires on 31 December 2011; 3,5 mg may be used per lamp after 31 December 2011.
2(a)(4)	Tri-band phosphor with normal lifetime and a tube diameter > 28 mm (e.g. T12): 5 mg	Expires on 31 December 2012; 3,5 mg may be used per lamp after 31 December 2012.
2(a)(5)	Tri-band phosphor with long lifetime (≥ 25000 h): 8 mg	Expires on 31 December 2011; 5 mg may be used per lamp after 31 December 2011.
2(b)	Mercury in other fluorescent lamps not exceeding (per lamp):	
2(b)(1)	Linear halophosphate lamps with tube > 28 mm (e.g. T10 and T12): 10 mg	Expires on 13 April 2012.
2(b)(2)	Non-linear halophosphate lamps (all diameters): 15 mg	Expires on 13 April 2016.



Add: F&G, 23/F., Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209 Internet: Http://www.LCS-cert.com

2(b)(3)Non-linear tri-band phosphor lamps with tube diameter > 17 mm (e.g. T9)No limitation of use until 31 December 2 mg may be used per lamp after 31 Dece 2011.	
2(b)(4) Lamps for other general lighting and special purposes (e.g. induction lamps). No limitation of use until 31 December 2 mg may be used per lamp after 31 December 2 2011.	
3 Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes not exceeding (per lamp):	
3(a)Short length (≤500 mm)No limitation of use until 31 December 2 mg may be used per lamp after 31 Dece 2011.	
3(b)Medium length (> 500 mm and \leq 1 500 mm)No limitation of use until 31 December 2 may be used per lamp after 31 Decemb	er 2011.
3(c)Long length (> 1500 mm)No limitation of use until 31 December 2 mg may be used per lamp after 31 Dece 2011.	
4(a) Mercury in other low pressure discharge lamps (per lamp). No limitation of use until 31 December 2 mg may be used per lamp after 31 Dece	
4(b) Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved colour rendering index Ra > 60:	
4(b)-IP \leq 155 WNo limitation of use until 31 December 2 mg may be used per burner after 31 December 2 2011.	
4(b)-IINo limitation of use until 31 December 2 mg may be used per burner after 31 December 2 2011.	
4(b)-IIIP > 405 WNo limitation of use until 31 December 2 mg may be used per burner after 31 December 2 2011.	
4(c) Mercury in other High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner):	
4(c)-IP \leq 155 WNo limitation of use until 31 December 2 mg may be used per burner after 31 De 2011.	
$4(c)$ -II155 W < P \leq 405 WNo limitation of use until 31 December 2 mg may be used per burner after 31 Dec 2011.	
4(c)-IIIP > 405 WNo limitation of use until 31 December 2 mg may be used per burner after 31 Dec 2011.	
4(d) Mercury in High Pressure Mercury (vapour) Expires on 13 April 2015.	



Add: F&G, 23/F., Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209 Internet: Http://www.LCS-cert.com

4 (5)	Mercury in other discharge lamps for special	
4(f)	purposes not specifically mentioned in this	
	Annex.	
	Mercury in hand crafted luminous discharge	
	tubes used for signs, decorative or architectural	
	and specialist lighting and light-artwork, where	
	the mercury content shall be limited as follows:	
	(a) 20 mg per electrode pair + 0,3 mg per tube	
4(g)	length in cm ,but not more than 80 mg, for	Expires on 31 December 2018.
	outdoor applications and indoor applications	
	exposed to temperatures below 20°C;	
	(b) 15 mg per electrode pair + 0,24 mg per tube	
	length in cm, but not more than 80 mg, for	
	all other indoor applications.	
5(a)	Lead in glass of cathode ray tubes.	
5(b)	Lead in glass of fluorescent tubes not exceeding	
5(D)	0,2 % by weight.	
	Lead as an alloying element in steel for	
6(a)	machining purposes and in galvanized steel	
	containing up to 0,35 % lead by weight.	
6(h)	Lead as an alloying element in aluminium	
6(b)	containing up to 0,4 % lead by weight.	
$\mathbf{C}(\mathbf{z})$	Copper alloy containing up to 4% lead by	
6(c)	weight.	
	Lead in high melting temperature type solders	
7(a)	(i.e. lead- based alloys containing 85 % by	
	weight or more lead).	
	Lead in solders for servers, storage and storage	
7(b)	array systems, network infrastructure equipment	
7(0)	for switching, signalling, transmission, and	
	network management for telecommunications.	
	Electrical and electronic components containing	
	lead in a glass or ceramic other than dielectric	
7(c)-l	ceramic in capacitors, e.g. piezoelectronic	
	devices, or in a glass or ceramic matrix	
	compound.	
_/ 、	Lead in dielectric ceramic in capacitors for a	
7(c)-II	rated voltage of 125 V AC or 250 V DC or	
	higher.	
7(a) !!!	Lead in dielectric ceramic in capacitors for a	Expires on 1 January 2013 and after that date may
7(c)-111	rated voltage of less than 125 V AC or 250 V	be used in spare parts for EEE placed on the
	DC. Lead in PZT based dielectric ceramic materials	market before 1 January 2013.
7(0) 1)/		
7(c)-IV	for capacitors being part of integrated circuits or discrete semiconductors.	
		Expires on 1 January 2012 and after that date
8(a)	Cadmium and its compounds in one shot pellet	may
σ(α)	type thermal cut-offs.	be used in spare parts for EEE placed on the
		I be used in spare parts for EEE placed on the



Add: F&G, 23/F.,Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209 Internet: Http://www.LCS-cert.com

		market before 1 January 2012.
8(b)	Cadmium and its compounds in electrical contacts.	
9	Hexavalent chromium as an anticorrosion agent of the carbon steel cooling system in absorption refrigerators up to 0,75 % by weight in the cooling solution.	
9(b)	Lead in bearing shells and bushes for refrigerant -containing compressors for heating, ventilation, air conditioning and refrigeration (HVACR) applications.	Applies to categories 8, 9 and 11; expires on: -21 July 2023 for category 8 in vitro diagnostic medical devices; -21 July 2024 for category 9 industrial monitoring and control instruments and for category 11; -21 July 2021 for other subcategories of categories 8 and 9.
9(b)-(l)	Lead in bearing shells and bushes for refrigerant -containing hermetic scroll compressors with a stated electrical power input equal or below 9 kW for heating, ventilation, air conditioning and refrigeration (HVACR) applications.	Applies to category 1; expires on 21 July 2019.
11(a)	Lead used in C-press compliant pin connector systems.	May be used in spare parts for EEE placed on the market before 24 September 2010.
11(b)	Lead used in other than C-press compliant pin connector systems.	Expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013.
12	Lead as a coating material for the thermal conduction module C-ring.	May be used in spare parts for EEE placed on the market before 24 September 2010.
13(a)	Lead in white glasses used for optical applications.	Applies to all categories; expires on: -21 July 2023 for category 8 in vitro diagnostic medical devices; -21 July 2024 for category 9 industrial monitoring and control instruments and for category 11; -21 July 2021 for all other categories and subcategories.
13(b)	Cadmium and lead in filter glasses and glasses used for reflectance standards.	Applies to categories 8, 9 and 11; expires on: -21 July 2023 for category 8 in vitro diagnostic medical devices; -21 July 2024 for category 9 industrial monitoring and control instruments and for category 11; -21 July 2021 for other subcategories of categories 8 and 9.



Add: F&G, 23/F., Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209 Internet: Http://www.LCS-cert.com

40/h) /l)	Logd in ion coloured entired filter along times	
13(b)-(l)	Lead in ion coloured optical filter glass types.	
13(b)-(II)	Cadmium in striking optical filter glass types; excluding applications falling under point 39 of this Annex.	Applies to categories 1 to 7 and 10; expires on 21 July 2021 for categories 1 to 7 and 10.
13(b)-(III)	Cadmium and lead in glazes used for reflectance standards.	
14	Lead in solders consisting of more than two elements for the connection between the pins and the package of microprocessors with a lead content of more than 80 % and less than 85 % by weight.	Expires on 1 January 2011 and after that date may be used in spare parts for EEE placed on the market before 1 January 2011.
15	Lead in solders to complete a viable electrical connection between semiconductor die and carrier within integrated circuit flip chip packages.	
16	Lead in linear incandescent lamps with silicate coated tubes.	Expires on 1 September 2013.
17	Lead halide as radiant agent in high intensity discharge (HID) lamps used for professional reprography applications.	
18(a)	Lead as activator in the fluorescent powder (1 % lead by weight or less) of discharge lamps when used as speciality lamps for diazoprinting reprography, lithography, insect traps, photochemical and curing processes containing phosphors such as SMS ((Sr,Ba)2MgSi2O7:Pb).	Expires on 1 January 2011.
18(b)	Lead as activator in the fluorescent powder (1 % lead by weight or less) of discharge lamps when used as sun tanning lamps containing phosphors such as BSP (BaSi2O5 :Pb).	
19	Lead with PbBiSn-Hg and PbInSn-Hg in specific compositions as main amalgam and with PbSn-Hg as auxiliary amalgam in very compact energy saving lamps (ESL).	Expires on 1 June 2011.
20	Lead oxide in glass used for bonding front and rear substrates of flat fluorescent lamps used for Liquid Crystal Displays (LCDs).	Expires on 1 June 2011.



Add: F&G, 23/F., Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209 Internet: Http://www.LCS-cert.com

ů – – – – – – – – – – – – – – – – – – –	
	May be used in spare parts for EEE placed on the
,	market before 24 September 2010.
	· · ·
	Expires on 1 June 2011.
	•
	Expired on 24 September 2010.
transformers.	
•	
	Expired on 1 July 2010.
pastes used on aluminium bonded beryllium	
	Lead in cermet-based trimmer potentiometer elements. Mercury used as a cathode sputtering inhibitor in DC plasma displays with a content up to 30 mg per display Lead in the plating layer of high voltage diodes on the basis of a zinc borate glass body. Cadmium and cadmium oxide in thick film



Add: F&G, 23/F.,Technology Building, Quanzhi Science and Technology Innovation Park, Industrial Building, Maozhoushan Industrial Park, Houting, Shajing Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86)755-23353209 Internet: Http://www.LCS-cert.com

Report No.: LCS190408063AR

39	Cadmium in colour converting II-VI LEDs (< 10 µg Cd per mm 2 of light-emitting area) for use in solid state illumination or display systems.	Expires on 1 July 2014.
40	Cadmium in photoresistors for analogue optocouplers applied in professional audio equipment.	Expires on 31 December 2013.
41	Lead in solders and termination finishes of electrical and electronic components and finishes of printed circuit boards used in ignition modules and other electrical and electronic engine control systems, which for technical reasons must be mounted directly on or in the crankcase or cylinder of hand-held combustion engines (classes SH:1, SH:2, SH:3 of Directive 97/68/EC of the European Parliament and of the Council.	Expires on 31 December 2018.

Statement:

- 1. The test report is considered invalidated without approval signature, special seal on the perforation.
- 2. The result(s) shown in this report refer only to the sample(s) tested.
- 3. Without written approval of LCS, this report can't be reproduced except in full.
- 4. The sample(s) and sample information was/were provided by the client who should be responsible for the authenticity which LCS hasn't verified.
- 5. In case of any discrepancy between the English version and Chinese version of the testing reports (if generated), the Chinese version shall prevail.

Revised pages

Edition	Release Date	Revision	Amendment