

APPLICATION FOR ELECTROMAGNETIC COMPATIBILITY DIRECTIVE

On Behalf of

Mid Ocean Brands B.V.

Key Chain Dual Light Alarm

Model No.: MO8742

Prepared for : Mid Ocean Brands B.V.

Address 7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan,

Kowloon, Hong Kong.

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.

Address Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,

518103, Shenzhen, Guangdong, China

Report Number : T1903075-C01-R01
Date of Receipt : March 11, 2019
Date of Test : March 11-14, 2019
Date of Report : March 14, 2019

Version Number : V0

TABLE OF CONTENTS

De	escript	tion	Page
1.	Sum	mary Of Standards And Results	7
	1.1.	Description of Standards and Results.	
2.	Gen	eral Information	
	2.1.	Description of Device (EUT)	
	2.2.	Accessories of Device (EUT)	
	2.3.	Tested Supporting System Details	9
	2.4.	Block Diagram of connectionbetween EUT and simulators	9
	2.5.	Test Mode Description	10
	2.6.	Test Facility	11
	2.7.	Measurement Uncertainty	11
3.	Con	ducted Disturbance At Mains Terminals Test	12
	3.1.	Test Equipment.	12
	3.2.	Block Diagram of Test Setup	12
	3.3.	Test Standard	
	3.4.	Power Line Conducted Emission Test Limits	12
	3.5.	Configuration of EUTon Test.	13
	3.6.	Operating Condition of EUT	13
	3.7.	Test Procedure.	13
	3.8.	Conducted Disturbance at Mains Terminals Test Results	14
4.	Radi	iated Electromagnetic Disturbance Test	15
	4.1.	Test Equipment	15
	4.2.	Block Diagram of Test Setup	15
	4.3.	Test Standard	
	4.4.	Radiated Electromagnetic Disturbance Limits	15
	4.5.	EUT Configuration on Test	
	4.6.	Operating Condition of EUT	16
	4.7.	Test Procedure.	
	4.8.	Radiated Electromagnetic Disturbance Test Results	
5.	Radi	iated Disturbance Test	
	5.1.	Test Equipment.	
	5.2.	Block Diagram of Test Setup	
	5.3.	Test Standard	
	5.4.	Radiated Disturbance Limit	
	5.5.	Configuration of EUTon Test	
	5.6.	Operating Condition of EUT	
	5.7.	Test Procedure	
	5.8.	Radiated Disturbance Test Result	
6.		monic Current Test	
	6.1.	Test Equipment	
	6.2.	Block Diagram of Test Setup	
	6.3.	Test Standard	26

	6.4.	Harmonic Current Test Limits			
	6.5.	Configuration of EUTon Test.	27		
	6.6.	Operating Condition of EUT	27		
	6.7.	Test Procedure	27		
	6.8.	Harmonic Current Test Results.	28		
7.	Volta	nge Fluctuations & Flicker Test	29		
	7.1.	Test Equipment.	29		
	7.2.	Block Diagram of Test Setup	29		
	7.3.	Test Standard	29		
	7.4.	Voltage Fluctuation and Flicker Test Limits.	29		
	7.5.	Configuration of EUTon Test.	30		
	7.6.	Operating Condition of EUT	30		
	7.7.	Test Procedure	30		
	7.8.	Voltage Fluctuation and Flicker Test Results	31		
8.	IMM	IUNITY PERFORMANCE CRITERIA	32		
9.	Elect	trostatic Discharge Test	33		
	9.1.	Test Equipment.	33		
	9.2.	Block Diagram of Test Setup.	33		
	9.3.	Test Standard	33		
	9.4.	Electrostatic Discharge Test Limits	33		
	9.5.	Configuration of EUT on Test	33		
	9.6.	Operating Condition of EUT	34		
	9.7.	Test Procedure.	34		
	9.8.	Electrostatic Discharge Test Results	35		
10.	RF F	Field Strength Susceptibility Test			
	10.1.	Test Equipment.			
	10.2.	Block Diagram of Test Setup			
	10.3.	Test Standard			
	10.4.	RF Field Strength susceptibility Test Limits	37		
	10.5.	Configuration of EUT on Test.	37		
	10.6.	Operating Condition of EUT			
	10.7.	Test Procedure	37		
		RF Field Strength Susceptibility Test Results			
11.		trical Fast Transient/Burst immuNity Test			
	11.1.	Test Equipment.			
	11.2.	Dlask Diagram of Tost Catum			
		Block Diagram of Test Setup			
	11.3.	Test Standard	39		
	11.3. 11.4.	Test Standard Electrical Fast Transient/Burst Test Limits	39 40		
	11.3.	Test Standard Electrical Fast Transient/Burst Test Limits Configuration of EUTon Test	39 40 40		
	11.3. 11.4.	Test Standard Electrical Fast Transient/Burst Test Limits Configuration of EUT on Test Operating Condition of EUT			
	11.3. 11.4. 11.5.	Test Standard Electrical Fast Transient/Burst Test Limits Configuration of EUT on Test Operating Condition of EUT Test Procedure	39 40 40 40		
	11.3. 11.4. 11.5. 11.6. 11.7. 11.8.	Test Standard Electrical Fast Transient/Burst Test Limits Configuration of EUT on Test Operating Condition of EUT Test Procedure Electrical Fast Transient/Burst immunity Test Results			
12.	11.3. 11.4. 11.5. 11.6. 11.7. 11.8.	Test Standard Electrical Fast Transient/Burst Test Limits Configuration of EUT on Test Operating Condition of EUT Test Procedure Electrical Fast Transient/Burst immunity Test Results GE Test			
12.	11.3. 11.4. 11.5. 11.6. 11.7. 11.8.	Test Standard Electrical Fast Transient/Burst Test Limits Configuration of EUT on Test Operating Condition of EUT Test Procedure Electrical Fast Transient/Burst immunity Test Results GE Test			

 Page 5 of 61 Report No.: T1903075-C01-R01

TEST REPORT DECLARATION

Applicant : Mid Ocean Brands B.V.

Address : 7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon,

Hong Kong.

Manufacturer : /
Address : /

EUT Description : Key Chain Dual Light Alarm

(A) Model No. : MO8742

(B) Trademark : N/A

Measurement Standard Used:

EN 55015:2013 + A1:2015

EN 61547:2009

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the EN 55015 and EN 61547 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Anne Qiu
Tested by (name + signature)......
Project
Engineer

Simple Guan

Approved by (name + signature).....: Project

Manager

Revision History

Revision	Issue Date	Revisions	Revised By
V0	March 14, 2019	Initial released Issue	Anne Qiu

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

The Ee T have been tested devotating to the approache standards as referenced below.						
	EMISSION					
Description of Test Item	Standard			Limits	Results	
Disturbance Voltages at mains terminals	EN 55015:2013+A1:20	015	Section 4.3		N/A	
Radiated Electromagnetic Disturbance	EN 55015:2013+A1:20)15	Sec	etion 4.4.1	P	
Radiated Disturbance	EN 55015:2013+A1:2	015	Sec	etion 4.4.2	P	
Harmonic current emissions	EN 61000-3-2:2014		(Class C	N/A	
Voltage fluctuations & flicker	EN 61000-3-3:2013		Section 5		N/A	
IMMUNITY (EN 61547:2009)						
Description of Test Item	Standard	Perform Criter		Observatio n Criteria	Results	
Electrostatic discharge (ESD)	IEC 61000-4-2:2008	В		A	P	
Radio- frequency, Continuous radiated disturbance	- A			A	P	
Electrical fast transient (EFT)	IEC 61000-4-4:2012	В		N/A	N/A	
Surge	IEC 61000-4-5:2014	С	N/A		N/A	
Radio- frequency, Continuous conducted disturbance	IEC 61000-4-6:2013	A		N/A	N/A	
Power frequency magnetic field	1 150.01000-4-8 /009			N/A	N/A	
Voltage dips, 100% reduction	IEC 61000-4-11:2004	В		N/A	N/A	
Voltage dips, 30% reduction	1EC 01000-4-11.2004	С		N/A	N/A	

Note:

- 1. P is an abbreviation for Pass.
- 2. F is an abbreviation for Fail.
- 3. N/A is an abbreviation for Not Applicable.

2. GENERAL INFORMATION

2.1.Description of Device (EUT)

Description : Key Chain Dual Light Alarm

Model Number : MO8742

Diff : N/A

Test Voltage : DC 4.5V from battery

Trademark : N/A

EUT Information Input: DC 4.5V

Software version : N/A Hardware version : N/A

2.2. Accessories of Device (EUT)

Power Source : N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	N/A	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators

For EMI and EMS Tests

EUT

EUT: Key Chain Dual Light Alarm/Window Alarm

2.5. Test Mode Description

For EMI&EMS Test					
No.	Test Mode	Test Voltage			
※ 1.	Lighting	DC 4.5V from battery			
2.	Alarm	DC 4.5V from battery			
3. Alarm+ Lighting DC 4.5V from battery					
Note: $\times 1$ is worst case mode tests, so this report only reflected the worst mode in each part.					

2.6. Test Facility

Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

2.7. Measurement Uncertainty

(95% confidence levels, k=2)


Item	MU	Remark
Uncertainty for Conducted Emission Test	2.74dB	
Uncertainty for Radiation Emission test in 3m	3.77dB	Polarize: V
chamber (30MHz to 1GHz)	3.80dB	Polarize: H
Uncertainty for Radiation Emission test in 3m	4.16dB	Polarize: H
chamber (1GHz to 25GHz)	4.13dB	Polarize: V
Uncertainty for radio frequency	5.4×10 ⁻⁸	
Uncertainty for conducted RF Power	0.37dB	

3. CONDUCTED DISTURBANCE AT MAINS TERMINALS TEST

3.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	101165	2018.09.21	1 Year
2.	L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2018.09.21	1 Year
3.	L.I.S.N.#2	ROHDE&SCH WARZ	ENV216	101043	2018.09.21	1 Year
4.	Pulse Limiter	Schwarzbeck	9516F	9618	2018.09.21	1 Year

3.2. Block Diagram of Test Setup

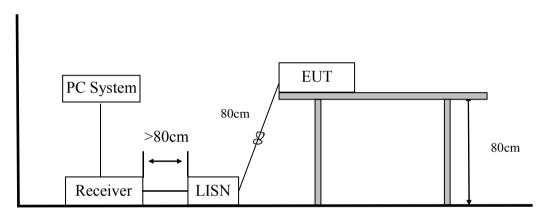

3.3. Test Standard

EN 55015:2013+A1:2015

3.4. Power Line Conducted Emission Test Limits

	Maximum RF Line Voltage			
Frequency	Quasi-Peak Level	Average Level		
	$dB(\mu V)$	$dB(\mu V)$		
9kHz ~ 50kHz	110			
50kHz ~ 150kHz	90 ~ 80*			
150kHz ~ 0.5MHz	66 ~ 56*	56 ~ 46*		
0.5MHz ~ 5.0MHz	56	46		
5.0MHz ~ 30MHz	60	50		

Notes:

- 1. Emission level=Read level + LISN factor-Preamp factor + Cable loss
- 2. * Decreasing linearly with logarithm of frequency.
- 3. The lower limit shall apply at the transition frequencies.

3.5. Configuration of EUT on Test

The following equipment are installed on conducted disturbance at mains terminals to meet the EN 55015 requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.6. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 3.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

3.7.Test Procedure

- (1) The EUT was placed on a non- metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). The power line was checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 55015 on Conducted Disturbance at Mains Terminals test.
- (2) The bandwidth of test receiver (R & S ESCI) is set: 200Hz at 9kHz to 150kHz, 9kHz at 150kHz to 30MHz.
- (3) The frequency range from 9kHz to 30MHz is checked. The test result are reported on Section 3.8.

3.8.Conducted Disturbance at Mains Terminals Test Results


EUT	:	Key Chain Dual Light Alarm	Test Date : N/A
M/N	:	MO8742	Temperature : N/A
Test Engineer	:	N/A	Humidity : N/A
Test Voltage	:	N/A	Pressure : N/A
Test Mode	:	N/A	
Test Results	:	N/A	
Note		The EUT is supplied by battery, so this it	em does not applicable

4. Radiated Electromagnetic Disturbance Test

4.1. Test Equipment

For fre	For frequency range 30MHz~1GHz (At Semi Anechoic Chamber)					
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	101165	2018.09.21	1 Year
2.	Triple- loop	EVERFINE	LLA-2	11050002	2018.09.21	2 Year
	Antenna					

4.2. Block Diagram of Test Setup

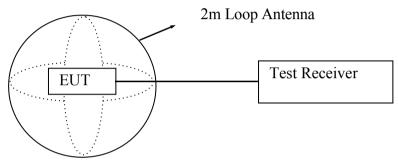

(EUT: Key Chain Dual Light Alarm/Window Alarm)

4.3. Test Standard

EN 55015:2013+A1:2015

4.4. Radiated Electromagnetic Disturbance Limits

Frequency	Limits for loop diameter (dBμA)
requency	2m
9kHz ~ 70kHz	88
70kHz ~ 150kHz	88 ~ 58*
150kHz ~ 3.0MHz	58 ~ 22*
3.0MHz ~ 30MHz	22

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

4.5. EUT Configuration on Test

The following equipments are installed on Radiated Electromagnetic Disturbance Test to meet EN 55015 requirement and operating in a manner that tends to maximize its emission characteristics in a normal application.

4.6. Operating Condition of EUT

- (1) Setup the EUT and simulator as shown as Section 4.2.
- (2) Turned on the power of all equipment.
- (3) Let the EUT worked in test mode and 15 minutes after taking the test.

4.7.Test Procedure

The EUT was placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. A three-field component was checked by means of a coaxial switch.

The frequency range from 9kHz to 30MHz was checked. The receiver was measured with the quasi-peak detector. For frequency band 9kHz to 150kHz.

The bandwidth of the field strength meter (R&S test receiver ESCI) is set at 200Hz.

For frequency band 150kHz to 30MHz, the bandwidth is set at 9kHz. The test result are reported on Section 4.8.


4.8. Radiated Electromagnetic Disturbance Test Results

EUT	:	Key Chain Dual Light Alarm	Test Date	:	2019.03.13
M/N	:	MO8742	Temperature	:	24℃
Test Engineer	:	Anne Qiu	Humidity	:	56%
Test Voltage	:	DC 4.5V from battery	Pressure	:	101.3Kpa
Test Mode	:	Lighting			
Test Results	:	PASS			

Note: 1. The test results are listed in next pages.

2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.


Antenna Polarity: X

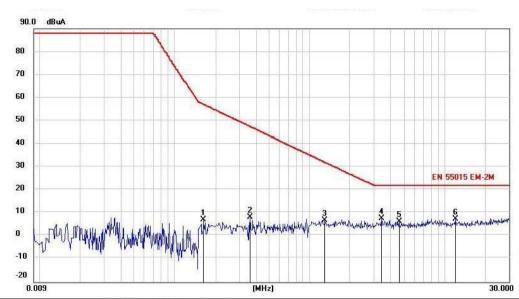

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margir	ו		
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	Comment	
1		0.1635	7.13	0.08	7.21	56.96	-49.75	peak		
2		0.3613	8.23	0.08	8.31	47.44	-39.13	peak		
3		1.3004	6.61	0.10	6.71	32.05	-25.34	peak		
4	*	3.4003	7.40	0.13	7.53	22.00	-14.47	peak		
5		4,6002	5.98	0.15	6.13	22.00	-15.87	peak		
6		12.0800	7.08	0.21	7.29	22.00	-14.71	peak		

Antenna Polarity: Y


Report No.: T1903075-C01-R01

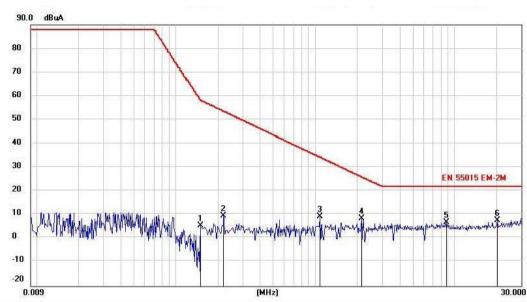

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margir	1		
	MHz	dBuA	dB	dBuA	dBuA	dB	Detector	Comment	
1	0.1500	5.37	0.08	5.45	58.00	-52.55	peak		
2	0.2179	9.54	0.08	9.62	53.51	-43.89	peak		
3	1.0804	9.31	0.10	9.41	34.27	-24.86	peak		
4	2.1604	8.23	0.10	8.33	25.95	-17.62	peak		
5	8.7004	6.49	0.19	6.68	22.00	-15.32	peak		
6 *	20.3002	7.27	0.43	7.70	22.00	-14.30	peak		

Antenna Polarity: Z

Report No.: T1903075-C01-R01

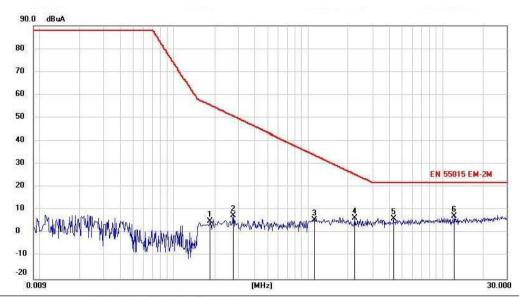

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margir	1		
	MHz	dBuA	dB	dBuA	dBuA	dB	Detector	Comment	
1	0.1859	4.98	0.08	5.06	55.42	-50.36	peak		
2	0.2760	7.60	0.08	7.68	50.67	-42.99	peak		
3	1.1204	5.73	0.10	5.83	33.84	-28.01	peak		
4	2.2204	6.47	0.10	6.57	25.62	-19.05	peak		
5	4.3003	6.05	0.15	6.20	22.00	-15.80	peak		
6 *	12.2804	7.07	0.22	7.29	22.00	-14.71	peak		


5. RADIATED DISTURBANCE TEST

5.1. Test Equipment

For fr	For frequency range 30MHz~1GHz (At Semi Anechoic Chamber)										
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval					
1	Test Receiver	Rohde&Schwarz	ESR	1316.3003K0 3-102082-Wa	2018.09.21	1 Year					
2	Bilog Antenna	Schwarzbeck	VULB 9168	9168-438	2018.04.13	2 Year					

5.2. Block Diagram of Test Setup

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

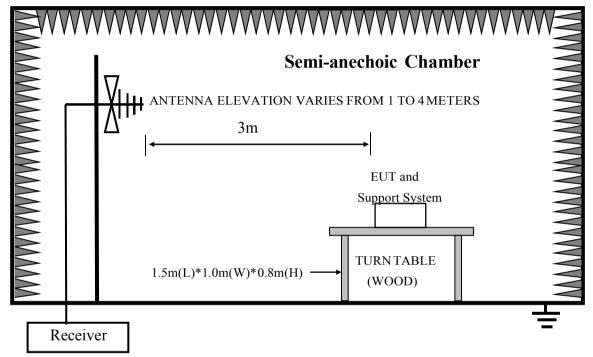

5.3. Test Standard

EN 55015:2013+A1:2015

5.4. Radiated Disturbance Limit

All emanations from computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS				
(MHz)	(Meters)	(dBµV/m)				
30 ~ 230	3	40				
230 ~ 300	3	47				

Note:

- (1) Emission level = Read level + Antenna Factor-Preamp Factor +Cable Loss
- (2) The lower limit shall apply at the transition frequencies.
- (3) Distance refers to the distance in meters between the test antenna and the closed point of any part of the EUT.

5.5. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the EN 55015 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

5.6. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 5.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

5.7.Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 55015 on Radiated Disturbance test.

The bandwidth setting on the test receiver (R&S TEST RECEIVER ES R) is 120 kHz. The frequency range from 30MHz to 300MHz is checked. Test results are reported in Section 5.8.


5.8.Radiated Disturbance Test Result

For below 1G radiated disturbance test result:									
EUT	: Key Chain Dual Light Alarm	Test Date : 2019.03.1	3						
M/N	: MO8742	Temperature : 24℃							
Test Engineer	: Anne Qiu	Humidity : 56%							
Test Voltage	: DC 4.5V from battery	Pressure : 101.3Kpa							
Test Mode	: Lighting								
Test Results	: PASS								

Note: 1. The test results are listed in next pages.

2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.

Antenna Polarity: V

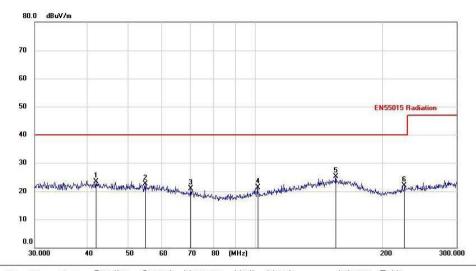


No.	Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBu√	dB	dBu√/m	dBuV/m	dB	Detector	cm	degree	Comment
1		41.9876	9.10	14.12	23.22	40.00	-16.78	peak			
2		54.8430	9.14	13.27	22.41	40.00	-17.59	peak			
3		70.4890	9.93	10.88	20.81	40.00	-19.19	peak			
4	-	101.4195	10.50	10.74	21.24	40.00	-18.76	peak			
5	*	155.2820	10.55	14.57	25.12	40.00	-14.88	peak			
6		226.5277	10.35	11.62	21.97	40.00	-18.03	peak			
								100			

Note:1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna Polarity: H

Report No.: T1903075-C01-R01

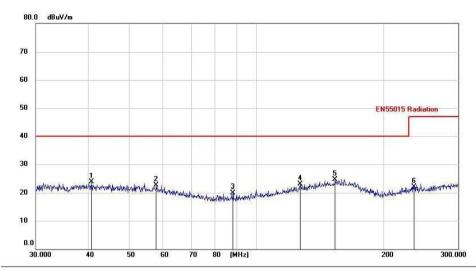

No.	Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBu√/m	dBuV/m	dB	Detector	cm	degree	Comment
1		40.7494	9.61	14.15	23.76	40.00	-16.24	peak			
2		57.8257	9.33	13.12	22.45	40.00	-17.55	peak			
3		88.1294	10.10	9.73	19.83	40.00	-20.17	peak			
4		127.0929	9.84	13.05	22.89	40.00	-17.11	peak			
5	ż	153.5046	10.01	14.56	24.57	40.00	-15.43	peak			
6	3	236.6580	10.05	11.92	21.97	47.00	-25.03	peak			


Note:1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

6. HARMONIC CURRENT TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Harmonics Flicker Analyser	Voltech	PM6000	20000670049	2018.09.21	1 Year

6.2. Block Diagram of Test Setup

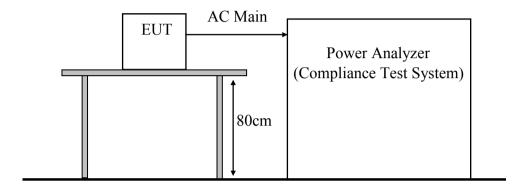

6.3. Test Standard

EN 61000-3-2: 2014, Class C

6.4. Harmonic Current Test Limits

	Limits for Class C equipment					
Harmonic order	Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency					
n	%					
2	2					
3	30 · λ *					
5	30 X					
7	10					
9	7					
11≤n≤39	5					
(odd harmonics only)	3					
* λ is the circuit power factor	3					

6.5. Configuration of EUT on Test

The following equipment are installed on Harmonic Current Test to meet the EN61000-3-2 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

6.6.Operating Condition of EUT

- (1) Setup the EUT as shown as Section 6.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

6.7.Test Procedure

- (1) The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the necessary for the EUT to be exercised.
- (2) The test results are reported on Section 6.8.

6.8. Harmonic Current Test Results


EUT	:	Key Chain Dual Light Alarm	Test Date	:	N/A					
M/N	:	MO8742	Temperature	:	N/A					
Test Engineer	:	N/A	Humidity	:	N/A					
Test Voltage	:	N/A	Pressure	:	N/A					
Test Mode	:	N/A								
Test Results	:	N/A								
Note: The EU	Note: The EUT is supplied by battery, so this item does not applicable									

7. VOLTAGE FLUCTUATIONS & FLICKER TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Harmonics Flicker Analyser	Voltech	PM6000	20000670049	2018.09.21	1 Year

7.2. Block Diagram of Test Setup

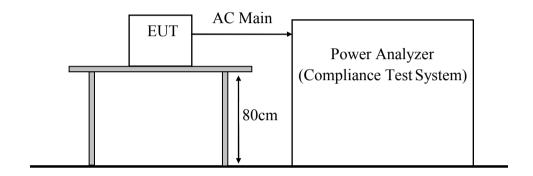

7.3. Test Standard

EN 61000-3-3: 2013

7.4. Voltage Fluctuation and Flicker Test Limits

Test Item	Limit	Note	
P _{st}	1.0	P _{st} means Short-term flicker indicator	
P _{lt}	0.65	P _{lt} means long-term flicker indicator	
T_{dt}	0.2	T _{dt} means maximum time that dt exceeds 3%	
d _{max} (%)	4%	d _{max} means maximum relative voltage change.	
d _c (%)	3.3%	d _c means relative steady-state voltage change.	

7.5. Configuration of EUT on Test

The following equipment are installed on Harmonic Current Test to meet the EN61000-3-3 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

7.6. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 7.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

7.7.Test Procedure

- (1) The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal conditions During the flick measurement; the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.
- (2) The test results are reported on Section 7.8.

7.8. Voltage Fluctuation and Flicker Test Results

EUT	:	Key Chain Dual Light Alarm	Test Date	:	N/A	
M/N	:	MO8742	Temperature	:	N/A	
Test Engineer	:	N/A	Humidity	:	N/A	
Test Voltage	:	N/A	Pressure	:	N/A	
Test Mode	Test Mode : N/A					
Test Results	:	N/A				
Note: The EUT is supplied by battery, so this item does not applicable						

8. IMMUNITY PERFORMANCE CRITERIA

Performance Level

Report No.: T1903075-C01-R01

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level by its manufacturer or the requestor of the test, or the agreed between the manufacturer and the purchaser of the product.

Definition related to the performance level:

- 1. Based on the used product standard
- 2. Based on the declaration of the manufacturer, requestor or purchaser

Criterion A:

Definition: normal performance within limits specified by the manufacturer, requestor and purchaser.

During the test no change of the luminous intensity shall be observed and the regulating control, if any shall operate duringthe test as intended.

Criterion B:

Definition: temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention.

During the test the luminous intensity may change to any value. After the test the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Criterion C:

Definition: temporary loss of function or degradation of performance, the correction of which requires operator intervention.

During and after the test any change of the luminous intensity is allowed and the lamps may be extinguished. After the test, within 30 min, all functions shall return to normal if necessary by temporary interruption of the mains supply and/or operating the regulating control. Additional requirement for Lighting equipment incorporating a starting device: after the test the Lighting equipment is switched off. After half an hour it is switched on again. The Lighting equipment shall start and operate as intended.


Criterion D:

Definition: loss of function or degradation of performance, which is not recoverable, owing to damage to hardware or software, or loss of data.

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	ESD Tester	HAEFELY	PESD161	H310546	2018.09.26	1 Year

9.2. Block Diagram of Test Setup

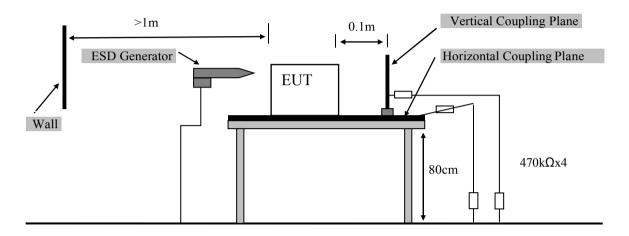

9.3. Test Standard

EN 61547:2009 (IEC 61000-4-2:2008)

9.4. Electrostatic Discharge Test Limits

Test Type	Test Level	Performance Criterion
Air Discharge	8KV	В
Contact Discharge	4KV	В

Notes:

- 1. A performance criterion C could be applied to toys mot using score or data entered by the user. Examples are musical soft toys, sounding toys, etc.
- 2. Test set- up reference IEC 61000-4-2:2008

9.5. Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-2 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

9.6. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 9.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

9.7.Test Procedure

(1) Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed

(2) Contact Discharge:

All the procedure was same as Section 9.7.1. except that the generator was re-triggered for a new single discharge for each pre-selected test point. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

(3) Indirect discharge for horizontal coupling plane :

At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

(4) Indirect discharge for vertical coupling plane:

At least 20 single discharge were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.8. Electrostatic Discharge Test Results

EUT	: Key Chain Dual Light Alarm	Test Date : 2019.03.14
M/N	: MO8742	Temperature : 24℃
Test Engineer	: Anne Qiu	Humidity : 56%
Test Voltage	DC 4.5V from battery	Pressure 101.3Kpa

Test Mode : Lighting

Test Results : PASS

Discharge	Tyme Of Discharge	Disabawasahla Dainta	Performance		
Voltage (kV)	Type Of Discharge	Dischargeable Points	Required	Observation	
±4	Contact	1	В	A	
±8	Air	2, 3, 4	В	A	
±4	HCP-Bottom	Edge of the HCP	В	A	
±4	VCP-Front	Center of the VCP	В	A	
±4	VCP-Left	Center of the VCP	В	A	
<u>±</u> 4	VCP-Back	Center of the VCP	В	A	
±4	VCP-Right	Center of the VCP	В	A	

Discharge Points Description

1	Metal	4	LED Light
<u>2</u>	Gap	<u>5</u>	
<u>3</u>	Button	<u>6</u>	

Note:


- 1. For the time interval between successive single discharges an initial value of one second.
- 2. For Discharge each Point Positive 10 times and negative 10 times discharge.
- 3. Class A is no function loss.

10. RF FIELD STRENGTH SUSCEPTIBILITY TEST

10.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Cal. Interval
1.	vector Signal Generator	Agilent	E4438C	US44271917	2018.09.11	1 Year
2.	Power meter	Agilent	E4419B	GB40202122	2018.09.11	1 Year
3.	Power Sensor	Agilent	E9300A	MY41496625	2018.09.21	1 Year
4.	RF power Amplifier	OPHIR	5225R	1045	N/A	NCR
5.	RF power Amplifier	OPHIR	5273R	1018	N/A	NCR
6.	Antenna	SCHWARZBECK	STLP9128E- special	STLP9128E s#139	N/A	NCR
7.	Antenna	SCHWARZBECK	STLP9128E- special	STLP 9149 #456	N/A	NCR

10.2. Block Diagram of Test Setup

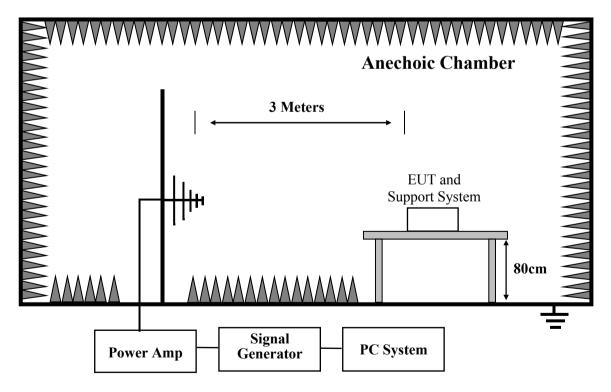

10.3. Test Standard

EN 61547: 2009 (IEC 61000-4-3:2006+A1:2007+A2:2010)

10.4.RF Field Strength susceptibility Test Limits

Test Specifications	Test Level	Performance Criterion	
80MHz-1000MHz	3V/m (r.m.s.)	A	

Report No.: T1903075-C01-R01

Notes: 1. Test set- up reference IEC 61000-4-3:2006 + A1:2007 + A2:2010

10.5. Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-3 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

10.6. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 10.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

10.7.Test Procedure

- (1) Testing was performed in a Fully anechoic chamber as recommended by IEC 61000-4-3. The EUT was placed on an 80 cm high non-conductive table located in the area of field uniformity. The radiating antenna was placed 3m in front of the EUT and Support
- system, and dwell time of the radiated interference was controlled by an automated, computer-controlled system.
 - The signal source was stepped through the applicable frequency range at a rate no faster than 1% of the fundamental. The signal was amplitude modulated 80% over the
- (3) frequency range 80 MHz to 1GHz at a level of 3 V/m. The dwell time was set at 3 s. Field presence was monitored during testing via a field probe placed in close proximity to the EUT.
- Throughout testing, the EUT was closely monitored for signs of susceptibility. The test was performed with the antennae oriented in both a horizontal and vertical polarization.
- (5) All the scanning conditions are as follows:

Condition of Test	Require of Test
Test Fielded Strength	3 V/m
Radiated Signal	80% amplitude modulated with a 1kHz sine wave
Scanning Frequency	80 - 1000 MHz
Sweeping time of radiated	0.0015 decade/s
Dwell Time	1 Sec.

10.8.RF Field Strength Susceptibility Test Results


EUT :	Key Chain Du	Ley Chain Dual Light Alarm			: 2019.03.14		
M/N : 1	MO8742			Temperature	: 24°C		
Test Engineer :	Anne Qiu			Humidity	: 56%		
Test Voltage	DC 4.5V from	battery		Pressure	101.3Kpa		
Test Mode :	Lighting	hting					
Test Results :	Test Results : PASS						
Modulation:	Modulation: ☑ AM ☐ Pulse ☐			one 1 kHz	80%		
		Frequency Range :8			80 MHz -1000MHz		
Steps	1%						
	Horizontal \		Ve	ertical	Result		
	Required	Observation	Required	Observation	(Pass / Fail)		
Front	A	A	A	A	Pass		
Right	A	A	A	A	Pass		
Rear A		A	A	A	Pass		
Left A A A			A	A	Pass		
Note: 1. Class A is no function loss.							

11. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

11.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Cal. Interval
1.	Multifunctio nal Compact Immunity Test system	3ctest	CCS 600	ES0801655	2018.09.21	1 Year
2.	Surge & EFT Coupling Decoupling Network	3ctest	SEPN 3832T	ES0951601	2018.09.21	1 Year
3.	Voltage variation and PF magnetic field regulating device	3ctest	VMT2216S	ES0441601	2018.09.21	1 Year
4.	Capacitive Coupling Clamp	3ctest	CCC 100	EC0441660	2018.09.21	1 Year

11.2. Block Diagram of Test Setup

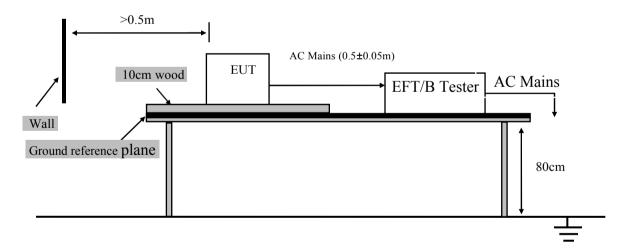

11.3. Test Standard

EN 61547:2009(IEC 61000-4-4: 2012) (Severity Level 2 at 1kV)

11.4 Electrical Fast Transient/Burst Test Limits

Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 kV	0.25 kV
2.	1 kV	0.5 kV
3.	2 kV	1 kV
4.	4 kV	2 kV
X	Special	Special

Notes:

1. Test set- up reference IEC 61000-4-4:2012

2. Performance criterion: B

11.5.Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-4 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

11.6. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 11.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

11.7.Test Procedure

The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. This reference ground plane was project

(1) beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

11.7.1. For input and AC power ports:

The EUT was connected to the power mains by using a coupling device that couples the EFT interference signal to AC power lines. Both positive transients and negative transients of test voltage were applied during compliance test and the duration of the test can't less than 1min.

11.7.2. For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

11.7.3. For DC input and DC output power ports:

It's unnecessary to test.

11.8.Electrical Fast Transient/Burst immunity Test Results


EUT	:	Key Chain Dual Light Alarm	Test Date	:	N/A
M/N	:	MO8742	Temperature	:	N/A
Test Engineer	:	N/A	Humidity	:	N/A
Test Voltage	:	N/A	Pressure	:	N/A
Test Mode	Test Mode : N/A				
Test Results : N/A					
Note: The EUT is supplied by battery, so this item does not applicable					

12. SURGE TEST

12.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Multifunctional Compact Immunity Test system	3ctest	CCS 600	ES0801655	2018.09.21	1 Year
2.	Surge & EFT Coupling Decoupling Network	3ctest	SEPN 3832T	ES0951601	2018.09.21	1 Year
3.	Voltage variation and PF magnetic field regulating device	3ctest	VMT22 16S	ES0441601	2018.09.21	1 Year
4.	Capacitive Coupli ng Clamp	3ctest	CCC 100	EC0441660	2018.09.21	1 Year

12.2. Block Diagram of Test Setup

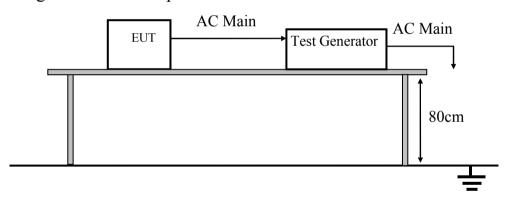

12.3. Surge Test Limits

Characteristics		Test levels Device				
		and semi-luminaires				
					≤25 W	>25 W
Wave-shape data		1,2/50 µs	1,2/50 µs	1,2/50 µs		
Test levels	line to line	±0,5 kV	±0,5 kV	±1,0 kV		
	line to ground	±1.0 kV	±1,0 kV	±2,0 kV		

NOTE In addition to the specified test level, all lower test levels as detailed in IEC 61000-4-5 should also be satisfied.

Severity level

Severity Level	Open-Circuit Test Voltage↔ kV↔	
1.	0.5₽	
2+	1.0↔	
34	2.0↔	
4.	4.0↔	
**	Special.	

Performance criterion: B

12.4.Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-5 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

12.5. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 12.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

12.6.Test Procedure

- (1) For line to line coupling mode, provide a 1.0kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- (2) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- (3) Different phase angles are done individually.
- (4) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.7.Surge Test Results


EUT	: Key Chain Dual Light Alarm	Test Date : N/A		
M/N	: MO8742	Temperature : N/A		
Test Engineer	: N/A	Humidity : N/A		
Test Voltage	: N/A	Pressure : N/A		
Test Mode	: N/A			
Test Results	: N/A			
Note	: The EUT is supplied by battery, so this item does not applicable			

13. INJECTED CURRENTS SUSCEPTIBILITY TEST

13.1. Test Equipments

Ite	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.
m						Interval
1.	CONDUCTED IMMUNITY TEST SYSTEM (RF-Generator)	Frankonia	CIT-10/75	12681247/2 013	2018.09.21	1 Year
2.	Fixed Coaxial Attenuator (6dB Attenuation)	CD	ATT-0675	120540086	2018.09.21	1 Year
3.	coupling-decoupli ng network (CDN)	CD	CDN M2/M3	2302	2018.09.21	1 Year
4.	Electromagnetic Injection Clamp (EMC-Clamp)	CD	EM-Clamp	0513A0312 01	2018.09.21	1 Year

13.2. Block Diagram of Test Setup

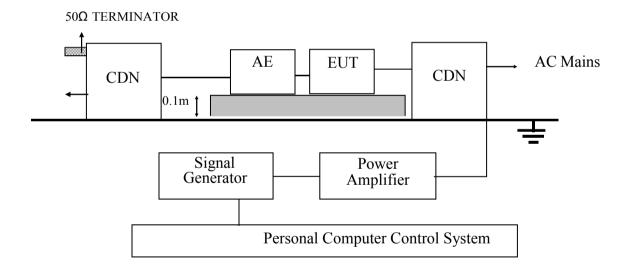

13.3. Test Standard

EN 61547: 2009 (IEC 61000-4-6: 2013)

(Severity Level 2 at 6Vrms and frequency is from 0.15MHz to 80MHz)

13.4. Injected currents susceptibility Test Limits

Level	Voltage Level (e.m.f.) V
1	1
2	3
3	10
X	Special

Notes:

- 1. Test set- up reference IEC 61000-4-6:2013
- 2. Performance criterion: A

13.5. Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-6 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

13.6. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 13.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

13.7.Test Procedure

- (1) Let the EUT work in test mode and test it.
 - The EUT are placed on an insulating support 0.1m high above a ground reference plane.
- (2) CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- (3) The disturbance signal described below is injected to EUT through CDN.
- (4) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- (5) The frequency range is swept from 0.150MHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.

 The rate of sweep shall not exceed 1.5*10-3decades/s. Where the frequency is swept
- (6) incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- (7) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

13.8.Injected currents susceptibility Test Results


EUT	: Key Chain Dual Light Alarm	Test Date	: N/A		
M/N	: MO8742	Temperature	: N/A		
Test Engineer	: N/A	Humidity	: N/A		
Test Voltage	: N/A	Pressure	: N/A		
Test Mode	: N/A				
Test Results	: N/A				
Note: The EUT is supplied by battery, so this item does not applicable					

14. MAGNETIC FIELD IMMUNITY TEST

14.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Cal. Interval
1.	Multifunctional Compact Immunity Test system	3ctest	CCS 600	ES0801655	2018.09.21	1 Year
2.	Surge & EFT Coupling Decoupling Network	3ctest	SEPN 3832T	ES0951601	2018.09.21	1 Year
3.	Voltage variation and PF magnetic field regulating device	3ctest	VMT2216S	ES0441601	2018.09.21	1 Year
4.	Capacitive Coupli ng Clamp	3ctest	CCC 100	EC0441660	2018.09.21	1 Year

14.2. Block Diagram of Test Setup

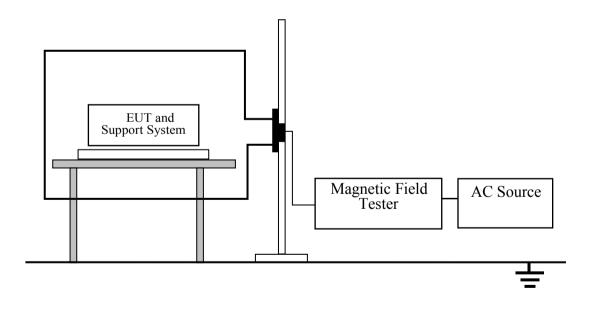

14.3. Test Standard

EN61547:2009(IEC 61000-4-8:2009)

14.4.magnetic field Test Limits

Level	Magnetic Field Strength A/m		
1	1		
2	3		
3	10		
4	30		
5	100		
X	Special		

Notes: 1. Test set- up reference IEC 61000-4-8:2009

14.5. Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-6 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

14.6. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 14.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

14.7.Test Procedure

The EUT was subjected to the test magnetic field by using the induction coil of standard

(1) dimensions (1m*1m) and shown in Section 14.2. The induction coil was then rotated by 90°in order to expose the EUT to the test field with different orientations.

14.8.magnetic field immunity Test Results

EUT	:	Key Chain Dual Light Alarm	Test Date	:	N/A
M/N	:	MO8742	Temperature	:	N/A
Test Engineer	:	N/A	Humidity	:	N/A
Test Voltage	:	N/A	Pressure	:	N/A
Test Mode	:	N/A			
Test Results	:	N/A			


The EUT not containing devices susceptible to magnetic fields, and Power- frequency Note: magnetic field test applicable only to EUT containing devices susceptible to magnetic fields, so the test not applicable.

15. VOLTAGE DIPS AND INTERRUPTIONS TEST

15.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Cal. Interval
1.	Multifunctional Compact Immunity Test system	3ctest	CCS 600	ES0801655	2018.09.21	1 Year
2.	Surge & EFT Coupling Decoupling Network	3ctest	SEPN 3832T	ES0951601	2018.09.21	1 Year
3.	Voltage variation and PF magnetic field regulating device	3ctest	VMT2216S	ES0441601	2018.09.21	1 Year
4.	Capacitive Coupl ing Clamp	3ctest	CCC 100	EC0441660	2018.09.21	1 Year

15.2. Block Diagram of Test Setup

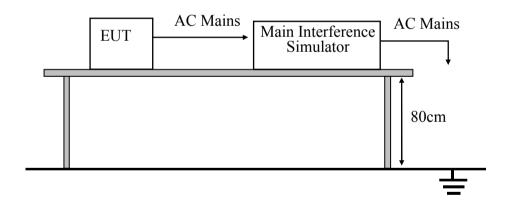

15.3. Test Standard

EN 61547: 2009 (IEC 61000-4-11: 2004)

15.4. Voltage dips and interruptions Test Limits

Test Level %UT	Voltage dip and short interruptions %UT	Performance Criterion	Duration (in period)
0	100	С	0.5
70	30	В	10

Report No.: T1903075-C01-R01

Notes:

1. Test set- up reference IEC 61000-4-11:2004

2. Performance criterion: **B&C**

15.5. Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-11 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

15.6. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 15.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

15.7. Test Procedure


- (1) The interruption is introduced at selected phase angles with specified duration.
- (2) Record any degradation of performance.

15.8. Voltage dips and interruptions Test Results

EUT	:	Key Chain Dual Light Alarm	Test Date :	N/A
M/N	:	MO8742	Temperature :	N/A
Test Engineer	:	N/A	Humidity :	N/A
Test Voltage	:	N/A	Pressure :	N/A
Test Mode	:	N/A		
Test Results	:	N/A		
Note	:	The EUT is supplied by battery, so this item does not applicable		

16.PHOTOGRAPH


16.1.Photos of Radiated Disturbance Test (In Semi Anechoic Chamber)

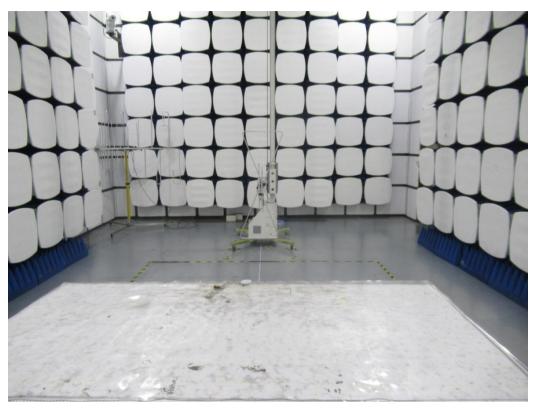


16.2.Photos of Radiated Electromagnetic Disturbance



16.3.Photos of Electrostatic discharge (ESD) Test

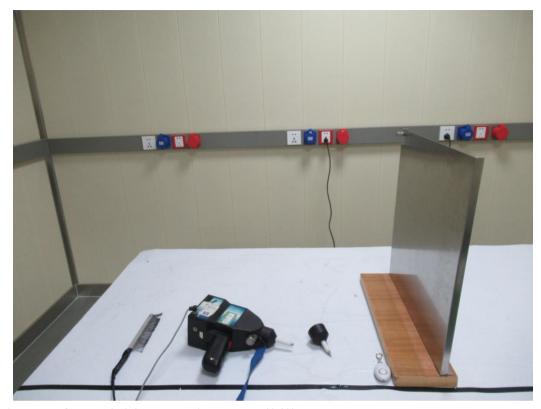

16.4.Photos of RF Field Strength susceptibility Test

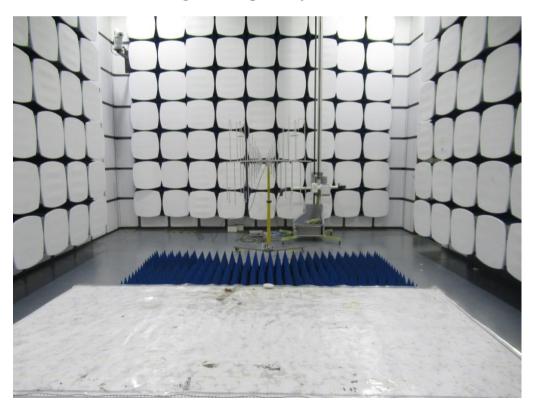

17.PHOTOS OF THE EUT



EUT View





EUT View



EUT View



EUT View



EUT View




EUT View




EUT View




EUT View

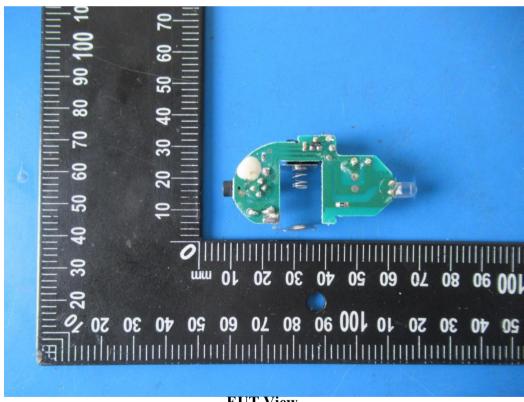

EUT View

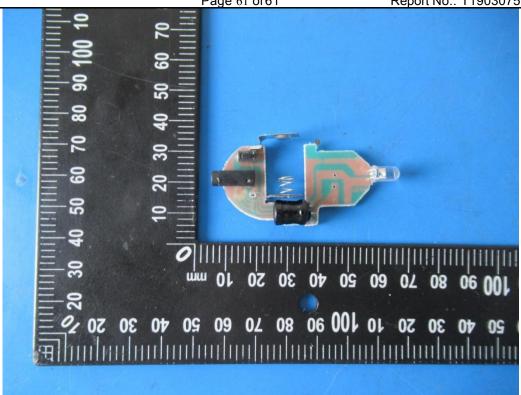

EUT View

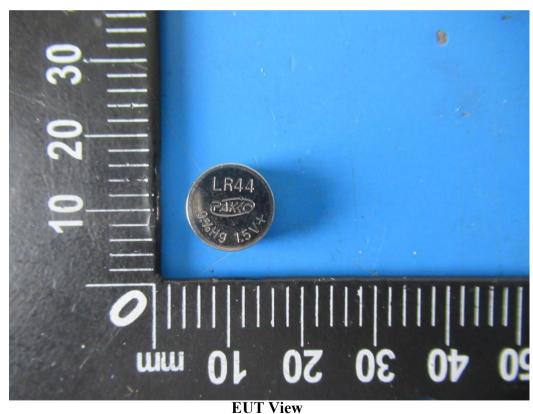

----END OF REPORT----